




**GRAVELLY**

2023 PRODUCT CATALOG

**WE PUT SO \ \ \ \ \**  
**\ MUCH INTO OUR**  
**MOWERS. WHICH**  
**\ IS WHY YOU GET**  
**SO MUCH OUT \ \**  
**\ \ \ \ \ \ \ \ OF THEM.**



**BLOOD, SWEAT & TEARS? SURE, THEY'RE  
IN THERE. HEART & SOUL? MAXED OUT.  
PRIDE? YOU'D BETTER BELIEVE IT. THEN,  
OF COURSE, THERE'S ALL THE SUPERIOR  
ENGINEERING, INNOVATION, AND ONLY  
THE BEST PARTS FROM THE SMALLEST  
BOLT TO OUR HEAVIEST-GAUGE STEEL. SO,  
IF YOU'RE WONDERING WHY YOU SHOULD  
CHOOSE **GRAVELY**, OUR ONLY QUESTION  
IS HOW LONG OF A LIST WOULD YOU LIKE?**

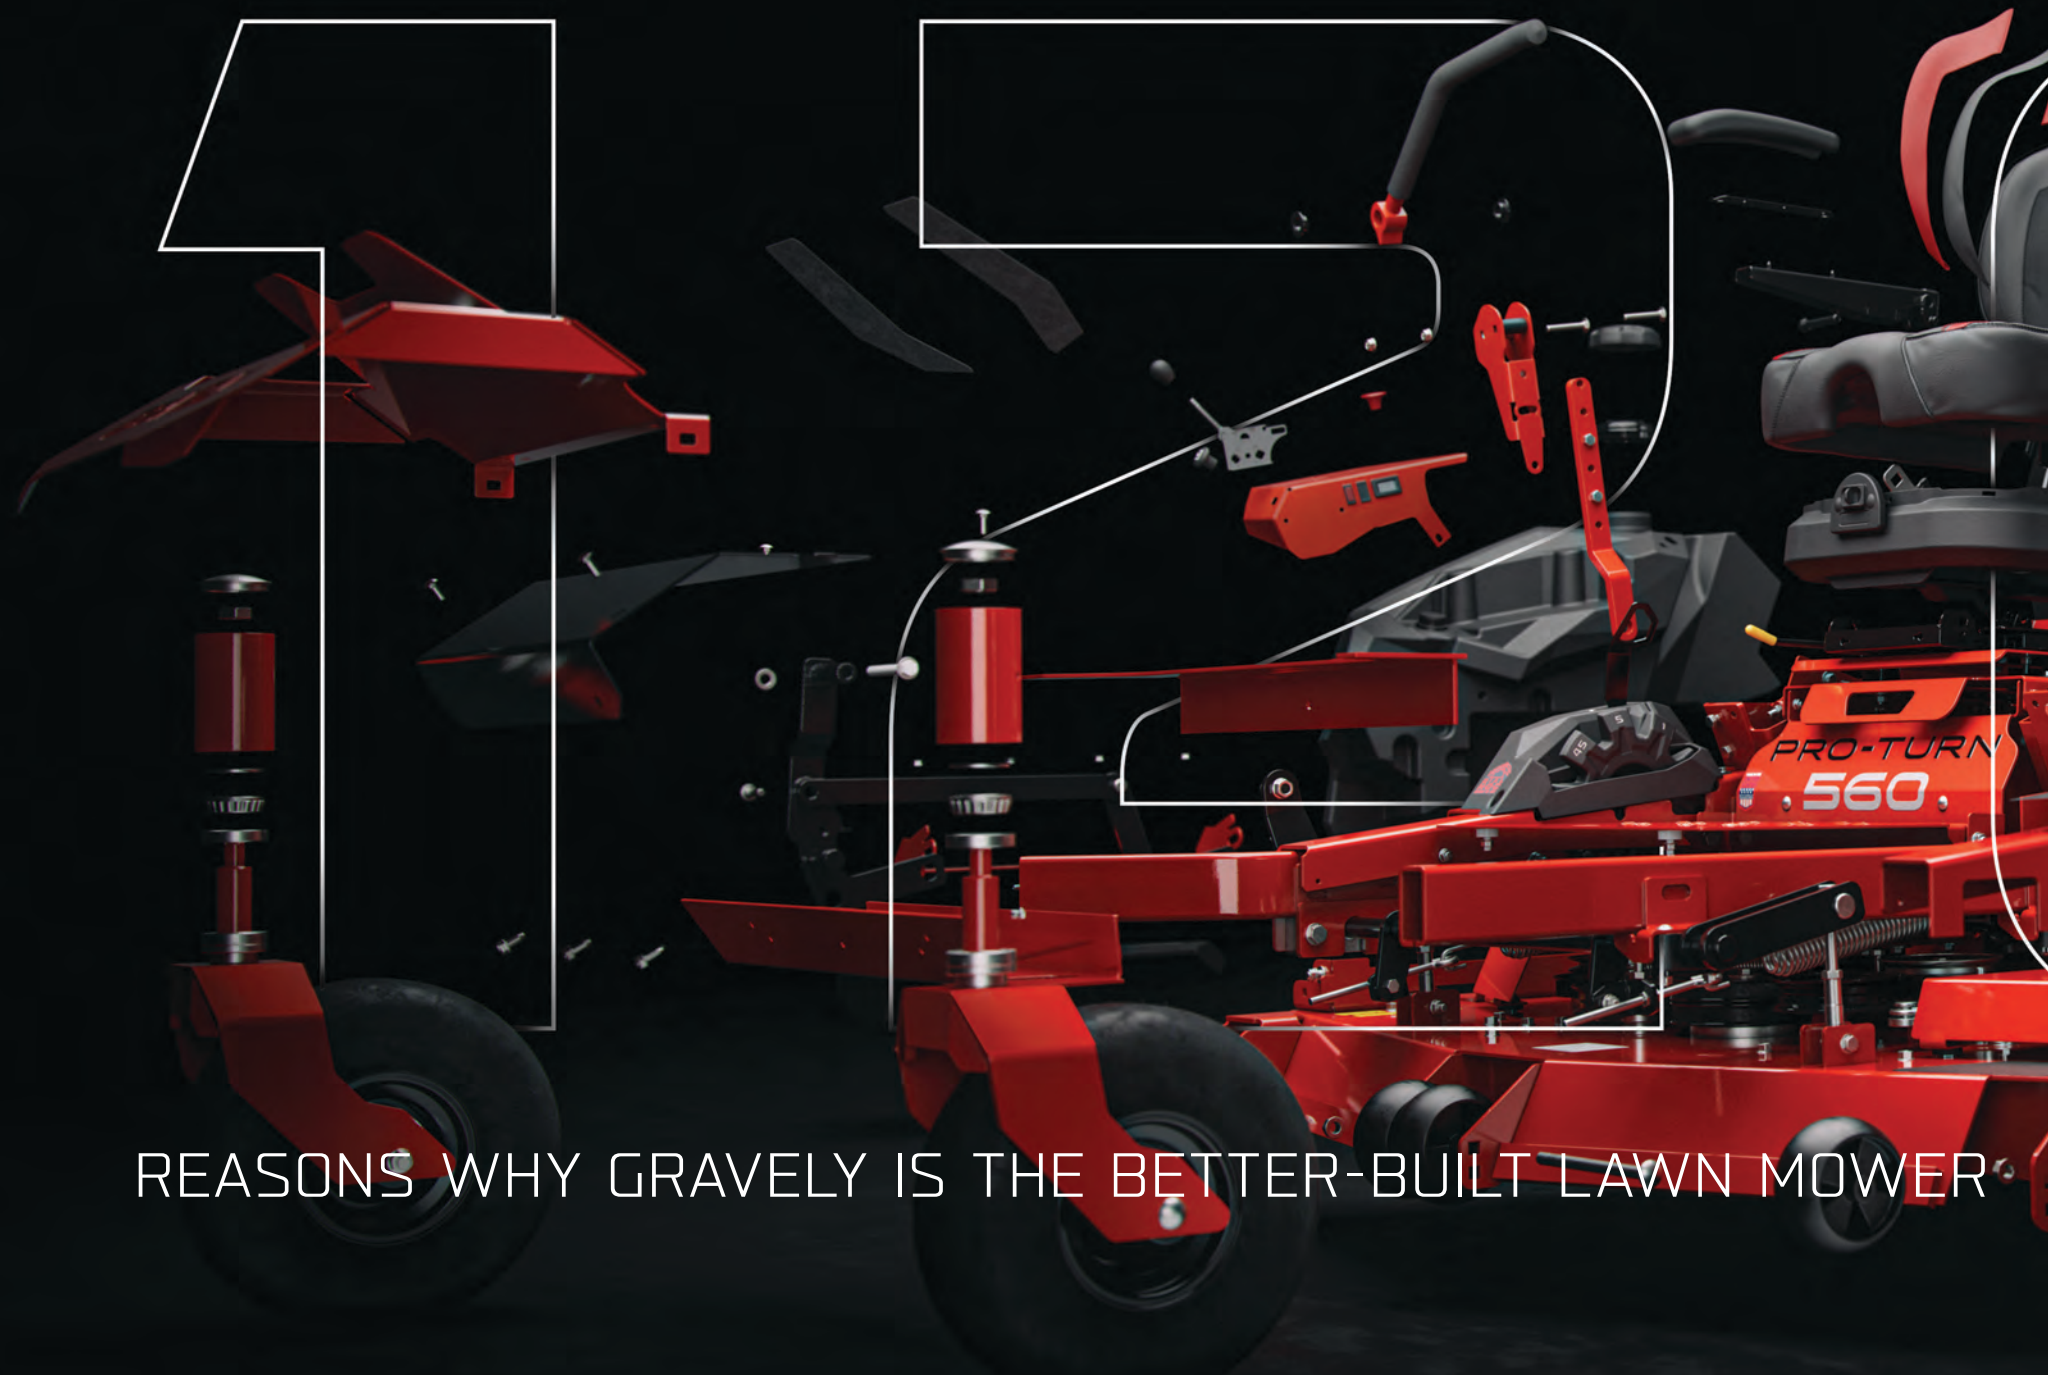

REASONS WHY GRAVELY IS THE BETTER-BUILT LAWN MOWER



## CHOICE

That's about how many parts go into some of our lawn mowers. And we don't skimp on a single one of them. Sure, we could save a few dollars here, a few cents there, but then we'd be building the same machines everyone else builds. But we're not. We're building Gravelys. Only the best parts will do.



## OUR FAMILY TREE

must have deep roots. How else could it support all these branches? The Gravely brand keeps growing and growing. That's what happens when you keep up with the demands of your customers. Commercial, residential, stand-ons, utility, electric, this is a prolific family of products with an unmatched pedigree.

**GRAVELY**



ZT X



ZT XL



PRO-TURN® 100



PRO-TURN® 300



PRO-TURN® MACH-ONE



PRO-STANCE® EV



PRO-STANCE®



Z-STANCE®





ZT HD



COMPACT-PRO®



PRO-TURN® ZX



PRO-TURN® 500



PRO-TURN® 600



PRO-TURN® EV



PRO-WALK®



Axis™



Atlas JSV®

# OUR SPECIFICATIONS FROM







# COME YOUR EXPECTATIONS.

*You are the reason we do what we do. We know how hard you work out there and it's our job to make sure our machines do the same. We design and engineer everything we build to be put through the same punishments you put yourself through. Early mornings. Long days. Unloading after dusk. You don't let up, so your equipment better not either. We share the same work ethic: a job isn't done until it's done right.*





# COMPACT-PRO<sup>®</sup>

**COMMERCIAL STRENGTH  
BROUGHT DOWN TO SIZE.**





*The Compact-Pro® was designed to take you where bigger mowers can't, like through gates as narrow as 36". It's a smaller, more nimble ride but is still loaded with features like our bigger machines. This is power and durability with maximum versatility.*



**4YR OR 750HR**  
— WARRANTY —

**34"**

**MODEL - 991144**

15.5 HP Kawasaki® FX481V Engine

**44"**

**MODEL - 991145**

19 HP Kawasaki® FX600V Engine

**SMALLER FOOTPRINT**

*The Compact-Pro® easily passes through gates as narrow as 36 inches and nimbly maneuvers around common residential obstacles*

**FUEL TANK DESIGN** *Increases stability and improves machine handling and visibility.*

**KAWASAKI® FX ENGINE** *Powered by a Kawasaki® FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.*





# PRO-TURN<sup>®</sup> ZX

*CUTS LAWNS BEAUTIFULLY WITHOUT  
CUTTING CORNERS.*





*The Pro-Turn® ZX delivers the performance you expect from a Gravely. You'll feel its solid construction the moment you climb aboard. It easily handles tough commercial jobs yet leaves a beautifully manicured lawn. With the Pro-Turn® ZX the term "A lot of bang for your buck" definitely comes to mind.*



**4YR OR 750HR**  
— WARRANTY —

**48"**

**MODEL - 991286**

22 HP Kawasaki® FX691V Engine

**52"**

**MODEL - 991288**

22 HP Kawasaki® FX691V Engine

**60"**

**MODEL - 991290**

23.5 HP Kawasaki® FX730V Engine

**AN AUTOMOTIVE-STYLE TUBULAR FRAME** It's unique to the mowing industry and increases durability by withstanding force from any direction. This high-strength, premium frame is positioned with a lower center of gravity to improve stability while mowing on hillsides.

**ZT-3200® TRANSAXLES** They're more heavy duty and can handle higher speeds. They're also commercial grade and serviceable for a longer life span.

**X-FACTOR® 3 DECK** The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.

**SUSPENSION FORKS** Big impacts on rough terrain go virtually unnoticed by the operator. They also improve the overall ride and decrease driver fatigue.





# PRO-TURN<sup>®</sup> 100

*THE PERFECT BALANCE OF  
PERFORMANCE AND POWER.*





*This machine was built for the long haul. Hour after hour, acre after acre, you'll appreciate its comfort as much as its consistent cutting results. Take your pick of its three mower decks and get ready to tackle the toughest jobs out there. Then rest up because it'll be ready to tackle more the next day.*



**5YR OR 1000HR**  
— WARRANTY —

**48"**

**MODEL - 991128**

22 HP Kawasaki® FX691V Engine

**52"**

**MODEL - 991129**

22 HP Kawasaki® FX691V Engine

**MODEL - 991132**

23 HP Kohler® ZT730 Engine

**60"**

**MODEL - 991130**

23.5 HP Kawasaki® FX730V Engine

**MODEL - 991133**

25 HP Kohler® EZT740 Engine

**CBT SYSTEM** Our Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.

**X-FACTOR® II DECK** Fabricated from top to bottom, this 7-gauge steel deck provides industrial-strength peace of mind.

**SEATING SYSTEM** All-day comfort comes from the high-back suspension seat with improved lateral stability and added vibration control, along with a 4-inch seat slide, lumbar support, and padded armrest.



WE TOO  
**ONE WI**





AK THE GOLDILOCKS APPROACH:  
**ALL BE JUST RIGHT.**



**THREE DIFFERENT MOWERS, EACH DESIGNED AND ENGINEERED FOR SPECIFIC WANTS AND NEEDS.** These are the big boys who put the “heavy” in “heavy-duty” and reinvented how comfortable a commercial mower can operate. Take your pick, any one of these machines will define your fleet and your entire crew will ride with pride.





# PRO-TURN<sup>®</sup> 300

*COMFORT AND DURABILITY,  
YARD AFTER YARD AFTER  
YARD AFTER  
YARD...*

GRAVELLY

PRO-TURN

GRAVELLY  
300





*A newly designed, hardworking mower built to keep its operators comfortable from dawn to dusk. This is next-level mowing thanks to its innovative features and superior cutting performance. A triumph in ingenuity and power that is equal parts David and Goliath, with the ultimate winner being the lawns it cuts.*



**5YR OR 1250HR**  
— WARRANTY —

**48"**

**MODEL - 992520**

22 HP Kawasaki® FX691V Engine

**52"**

**MODEL - 992521**

22 HP Kawasaki® FX691V Engine

**60"**

**MODEL - 992522**

23.5 HP Kawasaki® FX730V Engine

**MODEL - 992524**

25 HP Kohler® ZT740V Engine

**MODEL - 992523**

26 HP Kawasaki® FT730V-EFI Engine

**MODEL - 992526**

31 HP Kawasaki® FX921V

**72"**

**MODEL - 992525**

31 HP Kawasaki® FX921V Engine

**COMFORTABLE SEAT** High back seat has lumbar support and molded armrests. Its red double stitching gives a high-end look with black, dark grey, and red accents.

**PARKER TRANSAXLES** Parker HTJ transaxles deliver a stop speed of 11 mph and have 12cc pump. Filters are accessed from the rear for easy maintenance. It's one complete system, eliminating the need for additional parts





# PRO-TURN<sup>®</sup> MACH-ONE

*DEVOURS TALL GRASS FOR BREAKFAST,  
LUNCH, AND DINNER.*





Thanks to the tunnel chamber design of its deck, the Pro-Turn® Mach One is able to direct debris away from the blades to prevent them from bogging down. That means thick wet conditions, overgrown properties, even stalky grasses are easily cut down to size.



**5YR OR 1500HR**  
— WARRANTY —

**60"**

**MODEL - 992515**

31 HP Kawasaki® FX921V Engine



**HIGH-VOLUME OUTPUT (HVO) DECK**

The depth of this deck increases from its trim side to its discharge chute. That means it can handle a higher volume of clippings without clogging up.



**TUNNEL CHAMBER** An advanced cutting chamber is formed by setting the blades back four inches from the front of the deck for less clumping and even grass dispersion.



**INTEGRATED SEAT ISOLATORS** Bumps and engine vibration are smoothed out thanks to vibration-absorbing dampers.





**PRO-TURN<sup>®</sup> 500**

**AN UP-AND-COMING  
LEGEND IN THE FIELD.**





*This is the Pro-Turn® 500. A commercial-grade mower for professionals who want rugged durability without sacrificing features and performance. Better seating, better tires, a better mowing deck, and a better transmission make the Pro-Turn® 500 the better choice among the competition.*



**5YR OR 1500HR**  
— WARRANTY —

## 52"

**MODEL - 992513**

25 HP Kohler® ZT740 Engine

**MODEL - 992510**

27 HP Kawasaki® FX850V Engine, Air Ride

## 60"

**MODEL - 992514**

25 HP Kohler® ZT740 Engine

**MODEL - 992516**

29.5 HP Kawasaki® FX850V-EFI Engine

**MODEL - 992511**

31 HP Kawasaki® FX921V Engine, Air Ride

## 72"

**MODEL - 992518**

29.5 HP Kawasaki® FX850V-EFI Engine

**MODEL - 992512**

31 HP Kawasaki® FX921V Engine, Air Ride

**COMFORTABLE SEAT** High back seat has lumbar support and padded armrests, and its isolated mounting absorbs more shock.

**FULLY WELDED TUBULAR FRAME** Strong and rugged, its wide front rail distributes weight for superior balance and supports the deck lift for easy engagement.

**PARKER TRANSAXLES** They deliver a top speed of 15mph and have a 16cc pump. Access filters from the rear for easy maintenance.



A man wearing a dark cap and a dark shirt is operating a red Gravely Pro-Turn 600 riding lawn mower. The mower is positioned in a grassy field with trees in the background. The man is looking towards the left. The mower has "GRAVELLY" and "TUR 60" written on its side. A red banner with white text is overlaid on the image.

# PRO-TURN<sup>®</sup> 600

*MOW BIG OR STAY HOME.*





*When you climb aboard this mountain of a machine you know you've reached the summit of performance and comfort. It's loaded with features and built as tough as the people who use it. But that rugged construction didn't sacrifice comfort. It delivers the smoothest ride so operators will feel fresh from the first job of the day to last.*



**5YR OR 1500HR**  
— WARRANTY —

**52"**

**MODEL - 992500**

27 HP Kawasaki® FX850V Engine

**60"**

**MODEL - 992501**

35 HP Kawasaki® FX1000V Engine

**MODEL - 992503**

38.5 HP Kawasaki® FX1000V-EFI Engine

**72"**

**MODEL - 992502**

35 HP Kawasaki® FX1000V Engine

**MODEL - 992504**

38.5 HP Kawasaki® FX1000V-EFI Engine



**OPERATOR POD SYSTEM** Separates the operator from the mower's bouncing and jostling. You'll feel like you're floating as you mow faster and more comfortably, without sacrificing control.

**DIAL-A-HEIGHT** This lets the operator easily adjust the deck height by quarter-inch increments.

**X-FACTOR® 3 DECK** The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.



POWERED BY  
**FUSIONCORE**

It's the most forward-thinking battery system available, delivering the juice needed to keep you mowing the distance. These batteries are crammed with power, 4 kWh lithium-ion kind of power. That means combined, you have 16 kWh of total energy. This is battery power that you can rely on for all-day commercial performance.







# THE BUZZ ON OUR EV LINE IS EXPANDING

WE'VE TAKEN THE SUCCESS OF OUR PRO-TURN  
EV'S SUPERIOR DESIGN & TECHNOLOGY AND  
INCORPORATED IT INTO A STANDING UNIT.  
ALL THE POWER OUR FUSIONCORE BATTERY  
SYSTEM DELIVERS, RECONFIGURED  
TO OUR PRO-STANCE MODEL. IT'S  
ANOTHER OPTION FOR GOING  
ELECTRIC, AND IT'S BEEN GETTING  
A LOT OF STANDING OVATIONS.



# PRO-TURN<sup>®</sup> EV

*THAT QUIET HUM IS WHAT  
ADVANCED TECHNOLOGY  
SOUNDS LIKE.*







Powered by the superior battery technology from Fusioncore™, the EV's four swappable batteries deliver all-day, reliable, high-performance power. It's exactly what you've come to expect from Gravely and what you need in a commercial mower. You'll forget pullies, belts, engine oil changes, and driving vibrations even exist.



**5YR OR 1500HR**  
— WARRANTY —

**48"**

**SIDE DISCHARGE MODEL - 997005**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 997008**

4-16 kWh FusionCore Swappable Batteries

**52"**

**SIDE DISCHARGE MODEL - 997006**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 997009**

4-16 kWh FusionCore Swappable Batteries

**60"**

**SIDE DISCHARGE MODEL - 997007**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 997010**

4-16 kWh FusionCore Swappable Batteries

**FUSIONCORE QUICKSWAP BATTERIES**

Batteries can be switched in seconds to ensure you and your crew can continue to cut all day and beyond.

**X3 CONSTANT DRIVE SPINDLES** Our proprietary spindles have a blade slip feature that prevents damage in the event of an impact. They also have a bottom bearing for easy serviceability for routine maintenance which avoids the need to replace the entire spindle.

**NEXT-GEN WHEEL DRIVES** Transaxles are driven with a brushless electric-drive motor coupled with a dual-reduction planetary gearbox.



A red and black Gravely Pro-Stance EV utility vehicle is shown in a dark, blue-lit environment. The vehicle is positioned diagonally, with its front end towards the right. The lighting is dramatic, with a strong blue glow from the left and a red glow from the right, highlighting the vehicle's contours. The background is dark and hazy, suggesting an industrial or outdoor setting at night. The vehicle has a large, boxy body with a roll-over protection structure. The brand name "GRAVELLY" is visible on the side of the body, and "X-FACTOR 3" is visible on the front bumper area. The overall mood is industrial and powerful.

# PRO-STANCE<sup>®</sup> EV

*WE PROUDLY STAND BEHIND  
ITS ELECTRIC POWER.  
YOU WILL TOO.*





*Don't just sit there, step up to the future of mowing and stand up for green, eco-friendly service. Its power comes from the FusionCore™ battery system that can keep your crew cutting all day and longer. No more stops to fill gas tanks, just swap fully-charged batteries in seconds and continue the job. You'll also save time on maintenance since there are no oil filters or oil to change*



**5YR OR 1500HR**  
— WARRANTY —

**48"**

**SIDE DISCHARGE MODEL - 998001**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 998004**

4-16 kWh FusionCore Swappable Batteries

**52"**

**SIDE DISCHARGE MODEL - 998002**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 998005**

4-16 kWh FusionCore Swappable Batteries

**60"**

**SIDE DISCHARGE MODEL - 998003**

4-16 kWh FusionCore Swappable Batteries

**REAR DISCHARGE MODEL - 998006**

4-16 kWh FusionCore Swappable Batteries

**QUICK BATTERY SWAP SYSTEMS**

Gravelly EV mowers include a quick-swap battery system that allows you to run your mowers all day. No need to stop when the battery runs out. Just simply swap a new battery in and keep on mowing!

**QUIET OPERATION** Gas-powered lawn mowers are loud, especially in urban areas where the sound bounces off the structures. Electric mowers do not have the loud noises, or the vibrations mowers typically need to deal with when using gas. Lower noise pollution is a great.





# PRO-STANCE<sup>®</sup>

**THE MOWER THAT STANDS  
FOR POWER AND  
PERFORMANCE.**





*Some environments demand the versatility a standing mower brings, where operators can quickly jump on and off. The Pro-Stance delivers that and more with a deck that easily adjusts, a suspension platform to absorb vibration for all-day comfort, and the best cutting deck in the business.*

**X-FACTOR® 3 DECK** The deck has been completely redesigned for better grass dispersion. Its new look is constructed from 7-gauge steel to deliver years of solid performance.

**TRANSMISSION** The ZT-3400 integrated transmission boasts an industry-leading 1.125-inch axle for heavy loads (32" and 36" model uses ZT-3100).

**5YR OR 1000HR**  
— WARRANTY —



**32"**

**MODEL - 994157**

18.5 HP Kawasaki® FS600V Engine

**36"**

**MODEL - 994149**

18.5 HP Kawasaki® FS600V Engine

**48"**

**MODEL - 994961**

23.5 HP Kawasaki® FX730V Engine

**52"**

**MODEL - 994162**

23.5 HP Kawasaki® FX730V Engine

**MODEL - 994163**

26 HP Kawasaki® FT730V-EFI Engine

**60"**

**MODEL - 994164**

23.5 HP Kawasaki® FX730V Engine

**MODEL - 994165**

26 HP Kawasaki® FT730V-EFI Engine

**DECK HEIGHT ADJUSTMENT** The dual height-adjustment system was designed with both a traditional hand lever and a foot lever to lift and adjust the deck. It's perfect for smaller operators who may struggle with traditional hand lever lifts.





**Z-STANCE<sup>®</sup>**

**STAND TALL ON  
THE TURF.**





*You take a stand for comfort, ingenuity, and durability when you're on a Z-Stance. This is a powerful commercial stand-on mower that's easy to maneuver and just as easy to maintain. It makes quick work of a corporate campus or a gated backyard and helps save time and energy by keeping operators on their feet.*



**4YR OR 500HR**  
— WARRANTY —

**32"**

**MODEL - 994160**

18.5 HP Kawasaki® FS600V Engine

**48"**

**MODEL - 994159**

22 HP Kawasaki® FS651V Engine

**52"**

**MODEL - 994158**

22 HP Kawasaki® FS651V Engine

**ADJUSTABLE CRUISE BAR** Allows the operator to limit and expand the unit's maximum speed in tight working environments.

**THREE DECKS TO CHOOSE FROM** 10 gauge 48" and 52" X-Factor III decks or 32" deck in 7 gauge for added weight.

**HEIGHT-OF-CUT SYSTEM** Simple lever control for fast adjustments

**LOWERED CENTER OF GRAVITY** Reshaped geometry and redistributed weight provide increased hillside stability and confidence in your ride.





**PRO-WALK<sup>®</sup>**

**TAKE A STEP IN THE  
RIGHT DIRECTION.**





*That's the only direction when you walk behind a Pro-Walk. With a simple glide of its hydro lever, you can quickly change speed and maneuver with ease. This is a rugged commercial walk-behind designed for easy maintenance that could even be described as a walk in the park.*



**4YR OR 750HR**  
— WARRANTY —

**36"**

**MODEL - 988184**

14.5 HP Kawasaki® FS481V Engine

**48"**

**MODEL - 988185**

18.5 HP Kawasaki® FS600V Engine

**52"**

**MODEL - 988186**

18.5 HP Kawasaki® FS600V Engine

**60"**

**MODEL - 988187**

23 HP Kawasaki® FS691V Engine

**SINGLE-POINT HEIGHT-OF-CUT**

*Provides optimal cutting performance in 1/4-inch increments.*

**WIDE WHEELBASE** *Delivers superior hillside stability.*

**INTUITIVE STEERING CONTROLS**

*Offers a shortened learning curve while providing precision handling.*





# HAU SCOOL LI PUS

WHATEVER IT IS YOU  
NEED TO DO, WE HAVE THE  
MACHINES TO DO IT.





# LIT PIT FIT HIT

SURE, WE'RE KNOWN FOR OUR MOWERS, BUT THEY'RE NOT THE ONLY RUGGED MACHINES IN THE GRAVELLY LINE. OUR ATLAS JSV HAS THE POWER, TORQUE, AND HEAVY-DUTY SUSPENSION TO HAUL, TRANSPORT, TOW, DUMP – YOU NAME IT. AND IT EASILY SEATS THREE TO SIX. OR MAYBE YOU NEED A POWERFUL MULTI-TOOL TO ADD VERSATILITY AND EFFICIENCY TO YOUR CREW, THE AXIS PERFORMS A TON OF JOBS, INCLUDING MAXIMIZING THE CREW'S TIME IN THE FIELD.





**ZTX**

**BRING PROFESSIONAL  
STANDARDS TO  
YOUR LAWN.**





*This is the residential lawnmower that's often mistaken for a commercial mowing machine. It's no surprise with its heavy-duty construction, professional features, and legendary Gravelly performance. When you have a ZT X on your lawn, your neighborhood will know you're upping your lawn game to the next level.*

**NEW X-FACTOR® 11-GAUGE FABRICATED DECK** Inspired by our commercial machines, this all new 4 1/2 inch-deep steel deck optimizes airflow, and the reinforced sloped nose allows more room for grass to stand up ahead of the cutting chamber for our best cut ever on a residential machine.



**3YR OR 300HR**  
— WARRANTY —

**42"**

**MODEL - 918007**

23 HP Kohler® KT730 Engine

**MODEL - 918008**

21.5 HP Kawasaki® FR651V Engine

**48"**

**MODEL - 918009**

21.5 HP Kawasaki® FR651V Engine

**52"**

**MODEL - 918010**

23 HP Kohler® KT730 Engine

**MODEL - 918011**

23 HP Kawasaki® FR691V Engine

**HYDRO-GEAR® SERVICEABLE EZT® TRANSAXLES** Serviceable transaxles have optimized cooling to ensure smooth running for years to come. New service ports allow oil changes to help extend the life of your machine.

**NEW TALLER AND WIDER SEAT WITH MOLDED ARMRESTS** Ready for the long mow! This seat is 22" tall to provide more back support and is mounted on a taller seat base to make it easier to stand up and sit down. Molded armrests give your arms rest too.

**FULLY WELDED TUBULAR FRAME** This fully welded tubular frame is a professional-grade backbone tough enough to get the job done in your backyard.





**ZT XL**

**GIVE YOUR RESIDENTIAL LAWNS  
THE PROFESSIONAL  
TREATMENT.**





*Thanks to its professional-grade power and heavy-duty features, the ZT XL treats residential properties like a pro. It's built to handle big jobs while it delivers the comfort needed to mow multiple acres. This is a residential mower with the heart and soul of a commercial machine.*

**NEW X-FACTOR® 11-GAUGE FABRICATED DECK** Inspired by our commercial machines, this all new 4 1/2 inch-deep steel deck optimizes airflow, and the reinforced sloped nose allows more room for grass to stand up ahead of the cutting chamber for our best cut ever on a residential machine.



**4YR OR 400HR**  
— WARRANTY —

**42"**

**MODEL - 918012**

21.5 HP Kawasaki® FR651V Engine

**48"**

**MODEL - 918013**

23 HP Kawasaki® FR691V Engine

**52"**

**MODEL - 918015**

23 HP Kawasaki® FR691V Engine

**MODEL - 918014**

25 HP Kohler® KT740 Engine

**60"**

**MODEL - 918016**

24 HP Kawasaki® FR730V Engine

**HYDRO-GEAR® ZT-2800® TRANSAXLES**

Serviceable transaxles have optimized cooling to ensure smooth running for years to come. Integrated service ports on the internal reservoirs and a replaceable filter allow fluid changes for easy maintenance.

**RIDE LIKE A PRO** The 22" high back seat delivers more back support and has padded armrests. It's mounted on vibration-absorbing dampers. They smooth out bumps and engine vibration for a more comfortable ride.



A man with a beard and sunglasses is driving a red Gravely ZT HD zero-turn mower on a lawn. The mower is in the foreground, and the man is in the middle ground. The background shows trees and a cloudy sky. The text is overlaid on the left side of the image.

**ZT HD**

**A COMMERCIAL GRADE MACHINE  
THAT FEELS RIGHT AT HOME.**





*Influenced by commercial standards of power and durability, the ZT HD also delivers more style, more comfort, more speed, and more precision.*

*It's no wonder it's the number one selling machine in its class.*

**X-FACTOR® 3 DECK** Made with 10-gauge steel and specially designed for better grass dispersion thanks to its larger discharge opening, integrated baffles, and sloped front end.



**4YR OR 500HR**  
— WARRANTY —

**44"**

**MODEL - 991266**

21.5 HP Kawasaki® FR651V Engine

**48"**

**MODEL - 991268**

23 HP Kawasaki® FR691V Engine

**MODEL - 991274**

25 HP Kohler® KT740 Engine

**52"**

**MODEL - 991270**

23 HP Kawasaki® FR691V Engine

**MODEL - 991276**

25 HP Kohler® KT740 Engine

**60"**

**MODEL - 991272**

24 HP Kawasaki® FR730V Engine

**MODEL - 991278**

26 HP Kohler® KT745 Engine

**HYDRO-GEAR® ZT-3100® TRANSAXLES**  
*Reliable, commercial grade transaxles deliver the speed and torque to get your mowing done quickly. They're also easy to service for more longevity.*

**COMFORTABLE RIDE** High back seat with padded armrests, mounted on vibration absorbing dampers smoothing out bumps and engine vibration making for a comfortable ride.



# ZT HD STEALTH<sup>®</sup>

*ITS NAME MAY BE STEALTH,  
BUT IT CERTAINLY WON'T  
GO UNNOTICED.*



**4YR OR 500HR**  
— WARRANTY —



**CUSTOM MOLDED GRIPS** Two-tone, Gravelly-Red and black molded grips feel great to the touch, absorb the engine vibration, and ensure you are in constant control of your machine.

**LIMITED EDITION SEAT** Comfortable high back seat with armrests is ready for a long day of mowing and looks great on the grass or even parked in the garage. Wide seat base with bolstered padding, along with high-back cushions provide extra comfort and a secure ride.

**HOC PIN BOX**  
for height selection.

**LARGE FUEL TANK**

**RUBBER FLOOR MAT**  
Secure footing, vibration dampening, and extra cushioning while mowing.

**LIGHTING KIT** It may be named STEALTH, but it loves to be seen. Its bright, dual lighting makes sure of it.



**FULLY WELDED TUBULAR FRAME** The ZT HD STEALTH offers a superior and more robust welded tubular frame, giving you the integrity of a commercial frame in a residential package.

**X-FACTOR® 3 DECK** Made with 10-gauge steel and specially designed for better grass dispersion thanks to its larger discharge opening, integrated baffles, and sloped front end.

**22 X 11 AGGRESSIVE REAR TIRES** Big tires with aggressive tread continue the Stealth's premium look while delivering superior traction.

**MODEL  
991271**

**52"**

**23 HP KAWASAKI® FR691V ENGINE | WARRANTY: 4YR OR 500 HOUR**

*Military-inspired design with tactical graphics and badging make the ZT HD STEALTH® unlike any other mower on the market. It's built at the intersection of power and style with two-tone black paint and Kawasaki power. When you hit the ignition and engage the blades, the grass will never know what cut it.*



# OUTFIT YOUR GRAVELY WITH MORE OF THE BEST.

These additional tools and accessories have been meticulously engineered and come straight from the factory to fit seamlessly with your machine. They can help shave time off your schedule or help lighten the load. Looks like you can improve on perfection.



## MAINTENANCE KITS

Gravelly maintenance kits offer a complete service package, designed to protect your engine and promote optimal performance levels.



## OEM OIL

Gravelly Oils are specifically formulated to provide protection for your engine in the toughest of environments.



## OEM BELTS

Designed to be a perfect fit for your machine, Gravelly OEM belts provide the strength, longevity and quality needed to enhance performance and cut quality.



## MULCH KIT

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.



## LASEREDGE BLADE

These self-sharpening blades last up to 5 times longer than standard blades, helping to minimize downtime.



## POWERED DECK LIFT

Powered lift kits make cutting-height adjustments smooth and simple.



## REAR TWEEL

These airless, run-flat tires help to minimize your downtime and dampen the effect of uneven terrain.



## BAGGER SYSTEMS

Gravely's two- and three-bucket mesh bags provide superior airflow and venting.



## LIGHT KIT

The LED headlight kit will light your way and keep you cutting long after others call it a day.



## HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.








**AMERICAN MADE**

**IT STILL MEANS THE WORLD TO US**

For over 100 years every Gravelly that's come off our line has been built right here in the USA – and that's not changing any time soon. Because we believe in American ingenuity. We believe in the American work ethic. And just like the people who ride on a Gravelly, we believe in doing the job right. That's not only the American way, that's the Gravelly way.

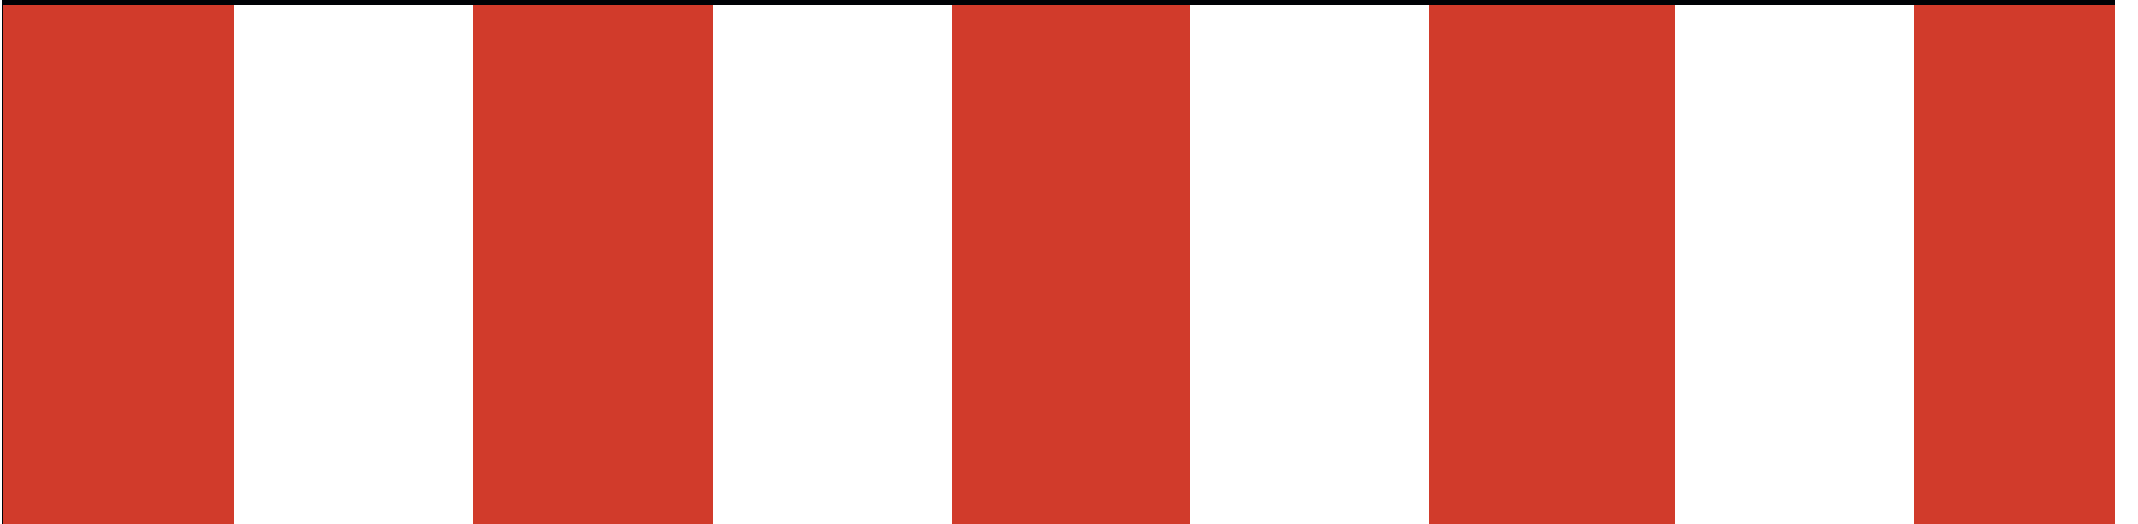



# COMPACT-PRO®

34

44

| MODEL NUMBER                         | 991144   | 991145           |
|--------------------------------------|--|------------------|
| ENGINE                               | KAWASAKI® FX CC481V, HEAVY DUTY AIR CLEANER  |                  |
| HORSEPOWER                           | 15.5 HP  | 19 HP            |
| DISPLACEMENT                         | 603 CC   | 726 CC           |
| DRIVE SYSTEM                         | HYDRO-GEAR® ZT-3100  |                  |
| FUEL CAPACITY                        | 7.2 GAL  |                  |
| GROUND SPEED (Forward/Reverse)       | 7 MPH / 3 MPH  |                  |
| <b>DECK</b>                          |  |                  |
| DECK MATERIAL                        | 10 GA. STEEL WITH 10 GA. SPINDLE REINFORCEMENT   |                  |
| DECK CONSTRUCTION                    | FABRICATED   |                  |
| NUMBER OF SPINDLES                   | 2  | 3                |
| BLADE TIP SPEED (FPM)                | 18,000   |                  |
| SPINDLE HOUSING MATERIAL             | FORGED ALUMINUM  |                  |
| SPINDLE BEARINGS                     | BALL BEARING   |                  |
| DECK ENGAGEMENT                      | OGURA® GT1.5   |                  |
| DECK LIFT SYSTEM                     | FOOT OPERATED  |                  |
| CUTTING WIDTH                        | 34 IN.   | 44 IN.           |
| CUTTING HEIGHT                       | 1.0 IN. - 5.0 IN.  |                  |
| CUTTING POSITIONS                    | 17   |                  |
| <b>WHEELS</b>                        |  |                  |
| FRONT AXLE                           | FIXED  |                  |
| FRONT                                | 13 X 5 - 6 SMOOTH PNEUMATIC  |                  |
| REAR                                 | 21 X 7-10 TURF   | 20.5 X 8-10 TURF |
| <b>FEATURES</b>                      |  |                  |
| SEAT                                 | HIGH BACK WITH SUSPENSION  |                  |
| FOLDABLE ROPS                        | OPTIONAL   |                  |
| <b>MACHINE</b>                       |  |                  |
| WEIGHT                               | 737 LBS.   | 789 LBS.         |
| LENGTH                               | 75 IN.   | 75 IN.           |
| WIDTH (w/o CHUTE)                    | 35.9 IN.   | 46.7 IN.         |
| WIDTH (w/ CHUTE)                     | 48.3 IN.   | 56.9 IN.         |
| HEIGHT                               | 45.3 IN.   |                  |
| <b>WARRANTY</b>                      |  |                  |
| UNIT                                 | 4 YEAR / 750 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                  |
| <b>ATTACHMENTS &amp; ACCESSORIES</b> |  |                  |

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, FOLDING ROPS KIT, GRASS CATCHER KIT, LEAF COLLECTOR KIT, WHEEL COVER KIT, LASEREDGE BLADES

See your professional Gravelly® dealer for complete warranty details.



# PRO-TURN® ZX

48

52

60

| MODEL NUMBER                   | 991286  | 991288              | 991290           |
|--------------------------------|---|---------------------|------------------|
| ENGINE                         | KAWASAKI® FX691V  | KAWASAKI® FX691V    | KAWASAKI® FX730V |
| HORSEPOWER                     | 22 HP   | 22 HP               | 23.5 HP          |
| DISPLACEMENT                   |   | 726 CC              |                  |
| DRIVE SYSTEM                   |   | HYDRO-GEAR® ZT-3200 |                  |
| FUEL CAPACITY                  |   | 5.0 GAL             |                  |
| GROUND SPEED (Forward/Reverse) |   | 8.5 MPH / 4 MPH     |                  |
| <b>DECK</b>                    |   |                     |                  |
| DECK MATERIAL                  | 10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT  |                     |                  |
| DECK CONSTRUCTION              | FABRICATED X-FACTOR® 3  |                     |                  |
| NUMBER OF SPINDLES             | 3   |                     |                  |
| BLADE TIP SPEED (FPM)          | 18,000  |                     |                  |
| SPINDLE HOUSING MATERIAL       | FORGED ALUMINUM   |                     |                  |
| SPINDLE BEARINGS               | BALL BEARING  |                     |                  |
| DECK ENGAGEMENT                | OGURA® GT1.5  |                     |                  |
| CUTTING WIDTH                  | 48 IN.  | 52 IN.              | 60 IN.           |
| CUTTING HEIGHTS                | 1.5 IN. - 5.0 IN.   |                     |                  |
| CUTTING POSITIONS              | 15  |                     |                  |
| <b>WHEELS</b>                  |   |                     |                  |
| FRONT AXLE                     | SUSPENSION, GREASABLE CASTER FORK TUBES   |                     |                  |
| FRONT                          | SMOOTH 13 X 6.50-6  |                     |                  |
| REAR                           | TURF 22 X 10-12   | TURF 22 X 10.5-12   | TURF 22 X 12-12  |
| <b>FEATURES</b>                |   |                     |                  |
| SEAT                           | HIGH BACK COMFORT W/ SUSPENSION & PADDED ARMRESTS   |                     |                  |
| FOLDABLE ROPS                  | STANDARD  |                     |                  |
| <b>MACHINE</b>                 |   |                     |                  |
| WEIGHT                         | 925 LBS.  | 931 LBS.            | 952 LBS.         |
| LENGTH                         | 79 IN.  | 79 IN.              | 79 IN.           |
| WIDTH (w/o CHUTE)              | 50.8 IN.  | 56.2 IN.            | 63.7 IN.         |
| WIDTH (w/ CHUTE)               | 61.9 IN.  | 67.3 IN.            | 74.8 IN.         |
| HEIGHT (w/ ROPS EXT/DOWN)      | 72 IN. / 52 IN.   |                     |                  |
| <b>WARRANTY</b>                |   |                     |                  |
| UNIT                           | 4 YEAR / 750 HOUR LIMITED - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                     |                  |

## ATTACHMENTS & ACCESSORIES

MULCHING KIT, OCDB KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, AGGRESSIVE REAR TIRE KIT, STRIPING KIT, SUNSHADE KIT, POWERED BAGGER KIT, REAR TWEEL KIT, SUSPENSION SEAT KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.



# PRO-TURN® 100

148

152

152

160

160

| MODEL NUMBER                   | 991128  | 991129           | 991132        | 991130           | 991133        |
|--------------------------------|---|------------------|---------------|------------------|---------------|
| ENGINE                         | KAWASAKI® FX691V  | KAWASAKI® FX691V | KOHLER® ZT730 | KAWASAKI® FX730V | KOHLER® ZT740 |
| HORSEPOWER                     | 22 HP   | 22 HP            | 23 HP         | 23.5 HP          | 25 HP         |
| DISPLACEMENT                   | 726 CC  | 726 CC           | 747 CC        | 726 CC           | 747 CC        |
| DRIVE SYSTEM                   | HYDRO-GEAR® ZT-3400   |                  |               |                  |               |
| FUEL CAPACITY                  | 10 GAL  |                  |               |                  |               |
| GROUND SPEED (Forward/Reverse) | 10 MPH / 5 MPH  |                  |               |                  |               |
| <b>DECK</b>                    |   |                  |               |                  |               |
| DECK MATERIAL                  | 7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT  |                  |               |                  |               |
| DECK CONSTRUCTION              | FABRICATED  |                  |               |                  |               |
| NUMBER OF SPINDLES             | 3   |                  |               |                  |               |
| BLADE TIP SPEED (FPM)          | 18,000  |                  |               |                  |               |
| SPINDLE HOUSING MATERIAL       | FORGED ALUMINUM   |                  |               |                  |               |
| SPINDLE BEARINGS               | BALL BEARING  |                  |               |                  |               |
| DECK ENGAGEMENT                | OGURA® GT 2.75  |                  |               |                  |               |
| CUTTING WIDTH                  | 48 IN.  | 52 IN.           | 52 IN.        | 60 IN.           | 60 IN.        |
| CUTTING HEIGHTS                | 1.0 IN. - 5.0 IN.   |                  |               |                  |               |
| CUTTING POSITIONS              | 17  |                  |               |                  |               |
| <b>WHEELS</b>                  |   |                  |               |                  |               |
| FRONT AXLE                     | FIXED, GREASEABLE CASTER FORK TUBES   |                  |               |                  |               |
| FRONT                          | SMOOTH 13 X 6.50 - 6  |                  |               |                  |               |
| REAR                           | TURF 23 X 10.50 - 12  |                  |               |                  |               |
| <b>FEATURES</b>                |   |                  |               |                  |               |
| SEAT                           | SUSPENSION PLUSH SEAT WITH ARM RESTS  |                  |               |                  |               |
| FOLDABLE ROPS                  | STANDARD  |                  |               |                  |               |
| <b>MACHINE</b>                 |   |                  |               |                  |               |
| WEIGHT                         | 1062 LBS.   | 1079 LBS.        | 1068 LBS.     | 1121 LBS.        | 1110 LBS.     |
| LENGTH                         | 78.5 IN.  | 78.5 IN.         | 78.5 IN.      | 78.5 IN.         | 78.5 IN.      |
| WIDTH (w/o CHUTE)              | 50 IN.  | 55.5 IN.         | 55.5 IN.      | 63 IN.           | 63 IN.        |
| WIDTH (w/ CHUTE)               | 62 IN.  | 67.5 IN.         | 67.5 IN.      | 75 IN.           | 75 IN.        |
| HEIGHT (w/ ROPS EXT/DOWN)      | 68 IN. / 48 IN.   |                  |               |                  |               |
| <b>WARRANTY</b>                |   |                  |               |                  |               |
| UNIT                           | 5 YEAR / 1000 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                  |               |                  |               |
| DECK SHELL & FRAME             | LIMITED LIFETIME  |                  |               |                  |               |

## ATTACHMENTS & ACCESSORIES

MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, BAGGER KIT, SEMI-PNEUMATIC FRONT TIRE KIT, WHEEL COVER KIT, RADIAL DRIVE CONVERSION KIT, OCDB KIT, LASEREDGE BLADES, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.



# PRO-TURN® 300

348

352

360

360

360

360

372

| MODEL NUMBER                   | 992520  | 992521          | 992522          | 992524       | 992523             | 992526          | 992525          |
|--------------------------------|---|-----------------|-----------------|--------------|--------------------|-----------------|-----------------|
| ENGINE                         | KAWASAKI FX691V   | KAWASAKI FX691V | KAWASAKI FX730V | KOHLER ZT740 | KAWASAKI FT730 EFI | KAWASAKI FX921V | KAWASAKI FX921V |
| HORSEPOWER                     | 22 HP   | 22 HP           | 23.5 HP         | 25 HP        | 26 HP              | 31 HP           | 31 HP           |
| DISPLACEMENT                   | 726 CC  | 726 CC          | 726 CC          | 747 CC       | 726 CC             | 999 CC          | 999 CC          |
| DRIVE SYSTEM                   | PARKER HTJ TRANSMISSION   |                 |                 |              |                    |                 |                 |
| FUEL CAPACITY                  | 12.5 GAL  |                 |                 |              |                    |                 |                 |
| GROUND SPEED (Forward/Reverse) | 11 MPH / 5 MPH  |                 |                 |              |                    |                 |                 |
| <b>DECK</b>                    |   |                 |                 |              |                    |                 |                 |
| DECK MATERIAL                  | 7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT  |                 |                 |              |                    |                 |                 |
| DECK CONSTRUCTION              | X-FACTOR® 3 DECK  |                 |                 |              |                    |                 |                 |
| NUMBER OF SPINDLES             | 3   |                 |                 |              |                    |                 |                 |
| BLADE TIP SPEED (FPM)          | 18,000  |                 |                 |              |                    |                 |                 |
| SPINDLE HOUSING MATERIAL       | FORGED ALUMINUM   |                 |                 |              |                    |                 |                 |
| SPINDLE BEARINGS               | BALL BEARING  |                 |                 |              |                    |                 |                 |
| DECK ENGAGEMENT                | OGURA GT2.75  |                 |                 |              | OGURA GT3.5        |                 |                 |
| CUTTING WIDTH                  | 48 IN.  | 52 IN.          | 60 IN.          | 60 IN.       | 60 IN.             | 60 IN.          | 72 IN.          |
| CUTTING HEIGHTS                | 1.0 IN. - 5.5 IN.   |                 |                 |              |                    |                 |                 |
| CUTTING POSITIONS              | 19  |                 |                 |              |                    |                 |                 |
| <b>WHEELS</b>                  |   |                 |                 |              |                    |                 |                 |
| FRONT AXLE                     | FIXED, GREASEABLE CASTER FORK TUBES   |                 |                 |              |                    |                 |                 |
| FRONT                          | SMOOTH 15 X 6-6 PNEUMATIC   |                 |                 |              |                    |                 |                 |
| REAR                           | 24 X 12-16 BIAS PLY TURF  |                 |                 |              |                    |                 |                 |
| <b>FEATURES</b>                |   |                 |                 |              |                    |                 |                 |
| SEAT                           | SUSPENSION PLUSH SEAT WITH ARM RESTS  |                 |                 |              |                    |                 |                 |
| FOLDABLE ROPS                  | STANDARD  |                 |                 |              |                    |                 |                 |
| <b>MACHINE</b>                 |   |                 |                 |              |                    |                 |                 |
| WEIGHT                         | 1235 LBS.   | 1320 LBS.       | 1347 LBS.       | 1333 LBS.    | 1347 LBS.          | 1350 LBS.       | 1472 LBS.       |
| LENGTH                         | 84 IN.  | 84 IN.          | 84 IN.          | 84 IN.       | 84 IN.             | 84 IN.          | 86.2 IN.        |
| WIDTH (w/o CHUTE)              | 51 IN.  | 55 IN.          | 63 IN.          | 63 IN.       | 63 IN.             | 63 IN.          | 75 IN.          |
| WIDTH (w/ CHUTE)               | 63 IN.  | 67 IN.          | 75 IN.          | 75 IN.       | 75 IN.             | 75 IN.          | 87 IN.          |
| HEIGHT (w/ ROPS EXT/DOWN)      | 76.0 IN. /47.8 IN.  |                 |                 |              |                    |                 |                 |
| <b>WARRANTY</b>                |   |                 |                 |              |                    |                 |                 |
| UNIT                           | 5 YEAR/1250 HOUR COMMERCIAL/NO HOUR LIMIT FIRST 2 YEARS- SEE YOUR PROFESSIONAL GRAVELY DEALER FOR COMPLETE WARRANTY DETAILS |                 |                 |              |                    |                 |                 |
| DECK SHELL & FRAME             | LIMITED LIFETIME  |                 |                 |              |                    |                 |                 |

## ATTACHMENTS & ACCESSORIES

MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.



# PRO-TURN<sup>®</sup> MACH ONE

60

|  |   |
|--|---|
| <b>MODEL NUMBER</b>  | <b>992515</b>   |
| <b>ENGINE</b>  | KAWASAKI <sup>®</sup> FX921V  |
| <b>HORSEPOWER</b>  | 31 HP   |
| <b>DISPLACEMENT</b>  | 999 CC  |
| <b>DRIVE SYSTEM</b>  | PARKER HTG TRANSMISSION   |
| <b>FUEL CAPACITY</b>   | 12.5 GAL  |
| <b>GROUND SPEED (Forward/Reverse)</b>  | 15 MPH/6 MPH  |
| <b>DECK</b>  |   |
| <b>DECK MATERIAL</b>   | 7 GA. STEEL W/ .25 IN. SPINDLE REINFORCEMENT  |
| <b>DECK CONSTRUCTION</b>   | HIGH-VOLUME OUTPUT DECK   |
| <b>NUMBER OF SPINDLES</b>  | 3   |
| <b>BLADE TIP SPEED (FPM)</b>   | 18,000  |
| <b>SPINDLE HOUSING MATERIAL</b>  | FORGED ALUMINUM   |
| <b>SPINDLE BEARINGS</b>  | BALL BEARING  |
| <b>DECK ENGAGEMENT</b>   | OGURA <sup>®</sup> GT3.5 ELECTRIC CLUTCH  |
| <b>CUTTING WIDTH</b>   | 60 IN.  |
| <b>CUTTING HEIGHTS</b>   | 1.5 IN. - 5.5 IN.   |
| <b>CUTTING POSITIONS</b>   | 19  |
| <b>WHEELS</b>  |   |
| <b>FRONT AXLE</b>  | FIXED, GREASEABLE CASTER FORK TUBES   |
| <b>FRONT</b>   | SMOOTH 15 X 6-6 SEMI PNEUMATIC  |
| <b>REAR</b>  | 26 X 12-16 RADIAL TURF  |
| <b>FEATURES</b>  |   |
| <b>SEAT</b>  | HIGH BACK COMFORT W/ FULL SUSPENSION AND PADDED ARMRESTS  |
| <b>FOLDABLE ROPS</b>   | STANDARD  |
| <b>MACHINE</b>   |   |
| <b>WEIGHT</b>  | 1486 LBS.   |
| <b>LENGTH</b>  | 86.2 IN.  |
| <b>WIDTH (W/ CHUTE UP/DOWN)</b>  | 61 IN. / 74.6 IN.   |
| <b>HEIGHT (W/ ROPS EXT/DOWN)</b>   | 75 IN. / 47.75 IN.  |
| <b>WARRANTY</b>  |   |
| <b>UNIT</b>  | 5 YEAR / 1500 HOUR COMMERCIAL / NO HOUR LIMIT FIRST TWO YEARS - SEE YOUR PROFESSIONAL GRAVELY <sup>®</sup> DEALER FOR COMPLETE WARRANTY DETAILS |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>   |   |
| MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT |   |

See your professional Gravelly<sup>®</sup> dealer for complete warranty details.



# PRO-TURN® 500

552

552

560

560

560

572

572

| MODEL NUMBER                         | 992510  | 992513              | 992511          | 992514              | 992516              | 992518              | 992512          |
|--------------------------------------|---|---------------------|-----------------|---------------------|---------------------|---------------------|-----------------|
| ENGINE                               | KAWASAKI FX850V   | KOHLER ZT740        | KAWASAKI FX921V | KOHLER ZT740        | KAWASAKI 850V EFI   | KAWASAKI 850V EFI   | KAWASAKI FX921V |
| HORSEPOWER                           | 27 HP   | 25 HP               | 31 HP           | 25 HP               | 29.5 HP             | 29.5 HP             | 31 HP           |
| DISPLACEMENT                         | 852 CC  | 747 CC              | 999 CC          | 747 CC              | 852 CC              | 852 CC              | 999 CC          |
| DRIVE SYSTEM                         | PARKER HTG TRANSMISSION   |                     |                 |                     |                     |                     |                 |
| FUEL CAPACITY                        | 12.5 GAL  |                     |                 |                     |                     |                     |                 |
| GROUND SPEED (Forward/Reverse)       | 15 MPH / 6 MPH  |                     |                 |                     |                     |                     |                 |
| <b>DECK</b>                          |   |                     |                 |                     |                     |                     |                 |
| DECK MATERIAL                        | 7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT  |                     |                 |                     |                     |                     |                 |
| DECK CONSTRUCTION                    | X-FACTOR® 3 DECK  |                     |                 |                     |                     |                     |                 |
| NUMBER OF SPINDLES                   | 3   |                     |                 |                     |                     |                     |                 |
| BLADE TIP SPEED (FPM)                | 18,000  |                     |                 |                     |                     |                     |                 |
| SPINDLE HOUSING MATERIAL             | FORGED ALUMINUM   |                     |                 |                     |                     |                     |                 |
| SPINDLE BEARINGS                     | BALL BEARING  |                     |                 |                     |                     |                     |                 |
| DECK ENGAGEMENT                      | OGURA® GT3.5  |                     |                 |                     |                     |                     |                 |
| CUTTING WIDTH                        | 52 IN.  | 52 IN.              | 60 IN.          | 60 IN.              | 60 IN.              | 72 IN.              | 72 IN.          |
| CUTTING HEIGHTS                      | 1.0 IN. - 5.5 IN.   |                     |                 |                     |                     |                     |                 |
| CUTTING POSITIONS                    | 19  |                     |                 |                     |                     |                     |                 |
| <b>WHEELS</b>                        |   |                     |                 |                     |                     |                     |                 |
| FRONT AXLE                           | FIXED, GREASEABLE CASTER FORK TUBES   |                     |                 |                     |                     |                     |                 |
| FRONT                                | SMOOTH 15 X 6-6 SEMI PNEUMATIC  |                     |                 |                     |                     |                     |                 |
| REAR                                 | 26 X 12-16 RADIAL TURF  |                     |                 |                     |                     |                     |                 |
| <b>FEATURES</b>                      |   |                     |                 |                     |                     |                     |                 |
| PLUSH SEAT WITH ARM RESTS            | AIR RIDE  | ISOLATED SUSPENSION | AIR RIDE        | ISOLATED SUSPENSION | ISOLATED SUSPENSION | ISOLATED SUSPENSION | AIR RIDE        |
| FOLDABLE ROPS                        | STANDARD  |                     |                 |                     |                     |                     |                 |
| <b>MACHINE</b>                       |   |                     |                 |                     |                     |                     |                 |
| WEIGHT                               | 1447 LBS.   | 1423 LBS.           | 1487 LBS.       | 1463 LBS.           | 1477 LBS.           | 1580 LBS.           | 1580 LBS.       |
| LENGTH                               | 84 IN.  | 84 IN.              | 84 IN.          | 84 IN.              | 86.2 IN.            | 86.2 IN.            | 86.2 IN.        |
| WIDTH (w/o CHUTE)                    | 51 IN.  | 51 IN.              | 63 IN.          | 63 IN.              | 63 IN.              | 75 IN.              | 75 IN.          |
| WIDTH (w/ CHUTE)                     | 63 IN.  | 63 IN.              | 75 IN.          | 75 IN.              | 75 IN.              | 87 IN.              | 87 IN.          |
| HEIGHT (w/ ROPS EXT/DOWN)            | 76.0 IN./47.8 IN.   |                     |                 |                     |                     |                     |                 |
| <b>WARRANTY</b>                      |   |                     |                 |                     |                     |                     |                 |
| UNIT                                 | 5 YEAR/1500 HOUR COMMERCIAL/NO HOUR LIMIT FIRST 2 YEARS- SEE YOUR PROFESSIONAL GRAVELY DEALER FOR COMPLETE WARRANTY DETAILS |                     |                 |                     |                     |                     |                 |
| DECK SHELL & FRAME                   | LIMITED LIFETIME  |                     |                 |                     |                     |                     |                 |
| <b>ATTACHMENTS &amp; ACCESSORIES</b> |   |                     |                 |                     |                     |                     |                 |

MULCHING KIT, ELECTRIC DECK LIFT KIT, TRAILER KIT KIT, LED HEADLIGHT KIT, POWERED BAGGER KIT, OCDC KIT, SUNSHADE KIT, REAR TWEEL KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, LASEREDGE BLADE KIT, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.



# PRO-TURN® 600

652

660

660

672

672

| MODEL NUMBER                   | 992500  | 992501           | 992503                | 992502           | 992504                |
|--------------------------------|---|------------------|-----------------------|------------------|-----------------------|
| ENGINE                         | KAWASAKI® FX850V  | KAWASAKI® FX1000 | KAWASAKI® FX1000V-EFI | KAWASAKI® FX1000 | KAWASAKI® FX1000V-EFI |
| HORSEPOWER                     | 27 HP   | 35 HP            | 38.5 HP               | 35 HP            | 38.5 HP               |
| DISPLACEMENT                   | 852 CC  | 999 CC           | 999 CC                | 999 CC           | 999 CC                |
| DRIVE SYSTEM                   | PARKER HTG TRANSMISSION   |                  |                       |                  |                       |
| FUEL CAPACITY                  | 12.5 GAL  |                  |                       |                  |                       |
| GROUND SPEED (Forward/Reverse) | 15 MPH / 6 MPH  |                  |                       |                  |                       |
| <b>DECK</b>                    |   |                  |                       |                  |                       |
| DECK MATERIAL                  | 7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT  |                  |                       |                  |                       |
| DECK CONSTRUCTION              | FABRICATED X-FACTOR III   |                  |                       |                  |                       |
| NUMBER OF SPINDLES             | 3   |                  |                       |                  |                       |
| BLADE TIP SPEED (FPM)          | 18,000  |                  |                       |                  |                       |
| SPINDLE HOUSING MATERIAL       | FORGED ALUMINUM   |                  |                       |                  |                       |
| SPINDLE BEARINGS               | BALL BEARING  |                  |                       |                  |                       |
| DECK ENGAGEMENT                | OGURA® GT3.5  |                  |                       |                  |                       |
| CUTTING WIDTH                  | 52 IN.  | 60 IN.           | 60 IN.                | 72 IN.           | 72 IN.                |
| CUTTING HEIGHTS                | 1.0 IN. - 5.5 IN.   |                  |                       |                  |                       |
| CUTTING POSITIONS              | 19  |                  |                       |                  |                       |
| <b>WHEELS</b>                  |   |                  |                       |                  |                       |
| FRONT AXLE                     | FIXED, GREASEABLE CASTER FORK TUBES   |                  |                       |                  |                       |
| FRONT                          | SMOOTH 15 X 6-6 SEMI PNEUMATIC  |                  |                       |                  |                       |
| REAR                           | 26 X 12-16 LOW PROFILE RADIAL TURF  |                  |                       |                  |                       |
| <b>FEATURES</b>                |   |                  |                       |                  |                       |
| SEAT                           | HIGH BACK BOLSTERED SEAT WITH OPERATOR POD SUSPENSION SYSTEM  |                  |                       |                  |                       |
| FOLDABLE ROPS                  | STANDARD  |                  |                       |                  |                       |
| <b>MACHINE</b>                 |   |                  |                       |                  |                       |
| WEIGHT                         | 1535 LBS.   | 1586 LBS.        | 1601 LBS.             | 1646 LBS.        | 1661 LBS.             |
| LENGTH                         | 83 IN.  | 83 IN.           | 83 IN.                | 83 IN.           | 83 IN.                |
| WIDTH (w/o CHUTE)              | 55 IN.  | 63 IN.           | 63 IN.                | 75 IN.           | 75 IN.                |
| WIDTH (w/ CHUTE)               | 63 IN.  | 75 IN.           | 75 IN.                | 87 IN.           | 87 IN.                |
| HEIGHT (w/ ROPS EXT/DOWN)      | 71.5 IN / 47.8 IN   |                  |                       |                  |                       |
| <b>WARRANTY</b>                |   |                  |                       |                  |                       |
| UNIT                           | 5 YEAR / 1500 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                  |                       |                  |                       |
| DECK SHELL & FRAME             | LIMITED LIFETIME  |                  |                       |                  |                       |

## ATTACHMENTS & ACCESSORIES

MULCHING KIT, TRAILER HITCH KIT, LED HEADLIGHT KIT, STRIPING KIT, POWERED BAGGER KIT, OCDB KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT, OCDB KIT, SUNSHADE KIT, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, RADIAL DRIVE CONVERSION KIT, WHEEL COVER KIT, AIR RIDE SEAT KIT, LASEREDGE BLADES, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.



| <b>PRO-TURN® EV</b>   | <b>EV 48 SD</b>   | <b>EV 48 RD</b> | <b>EV 52 SD</b>          | <b>EV 52 RD</b> | <b>EV 60 SD</b>        | <b>EV 60 RD</b> |
|---|---|-----------------|--------------------------|-----------------|------------------------|-----------------|
| <b>MODEL NUMBER</b>   | <b>997005</b>   | <b>997008</b>   | <b>997006</b>            | <b>997009</b>   | <b>997007</b>          | <b>997010</b>   |
| <b>BATTERIES</b>  | 4 - 16 KWH FUSION CORE LITHIUM ION  |                 |                          |                 |                        |                 |
| <b>WHEEL DRIVE MOTORS</b>   | 5 KW PER MOTOR  |                 |                          |                 |                        |                 |
| <b>SPINDLE MOTORS</b>   | 3.5 KW PER MOTOR  |                 |                          |                 |                        |                 |
| <b>DRIVE SYSTEM</b>   | PROPRIETARY ELECTRIC TRANSAXLES   |                 |                          |                 |                        |                 |
| <b>GROUND SPEED (Forward/Reverse)</b>   | 8 MPH / 4MPH (LOW SPEED) – 11 MPH / 5.5 MPH (HIGH SPEED)  |                 |                          |                 |                        |                 |
| <b>DECK</b>   |   |                 |                          |                 |                        |                 |
| <b>DECK MATERIAL</b>  | 7 GA.   |                 |                          |                 |                        |                 |
| <b>DECK CONSTRUCTION</b>  | X-FACTOR 3® DECK  |                 |                          |                 |                        |                 |
| <b>NUMBER OF SPINDLES</b>   | 3   |                 |                          |                 |                        |                 |
| <b>BLADE TIP SPEED (FPM)</b>  | 18,000  |                 |                          |                 |                        |                 |
| <b>SPINDLE HOUSING MATERIAL</b>   | CAST ALUMINUM   |                 |                          |                 |                        |                 |
| <b>SPINDLE BEARINGS</b>   | SERVICEABLE BOTTOM BEARING  |                 |                          |                 |                        |                 |
| <b>DECK ENGAGEMENT</b>  | ELECTRIC DC BRUSHLESS MOTORS  |                 |                          |                 |                        |                 |
| <b>CUTTING WIDTH</b>  | 48 IN.  | 48 IN.          | 52IN.                    | 52 IN.          | 60 IN.                 | 60 IN.          |
| <b>CUTTING HEIGHTS</b>  | 1.5 IN. - 5.0 IN.   |                 |                          |                 |                        |                 |
| <b>CUTTING POSITIONS</b>  | 15  |                 |                          |                 |                        |                 |
| <b>WHEELS</b>   |   |                 |                          |                 |                        |                 |
| <b>FRONT AXLE</b>   | FIXED, GREASEABLE CASTER FORK TUBES   |                 |                          |                 |                        |                 |
| <b>FRONT</b>  | SMOOTH 13 X 6.5-6   |                 |                          |                 |                        |                 |
| <b>REAR</b>   | RADIAL TURF 22 X 10-12  |                 | RADIAL TURF 22 X 10.5-12 |                 | RADIAL TURF 22 X 12-12 |                 |
| <b>FEATURES</b>   |   |                 |                          |                 |                        |                 |
| <b>SEAT</b>   | HIGH BACK COMFORT WITH SUSPENSION   |                 |                          |                 |                        |                 |
| <b>FOLDABLE ROPS</b>  | STANDARD  |                 |                          |                 |                        |                 |
| <b>MACHINE</b>  |   |                 |                          |                 |                        |                 |
| <b>WEIGHT</b>   | 1261 LBS.   | 1286 LBS.       | 1284 LBS.                | 1301 LBS.       | 1312 LBS.              | 1326 LBS.       |
| <b>LENGTH</b>   | 83 IN.  | 83 IN.          | 83 IN.                   | 83 IN.          | 83 IN.                 | 83 IN.          |
| <b>WIDTH (w/o CHUTE)</b>  | 50 IN.  | 50 IN.          | 56 IN.                   | 54 IN.          | 63 IN.                 | 64 IN.          |
| <b>WIDTH (w/ CHUTE)</b>   | 62 IN.  | 50 IN.          | 67 IN.                   | 54 IN.          | 75 IN.                 | 62 IN.          |
| <b>HEIGHT (w/ ROPS EXT/DOWN)</b>  | 72 IN / 49 IN.  |                 |                          |                 |                        |                 |
| <b>WARRANTY</b>   |   |                 |                          |                 |                        |                 |
| <b>UNIT</b>   | 5 YEAR / 1500 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                 |                          |                 |                        |                 |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>  |   |                 |                          |                 |                        |                 |
| FUSIONCORE OFF BOARD PORTABLE CHARGER, REPLACEMENT BATTERIES, MULCHING KIT, LED HEADLIGHT KIT, BEACON LIGHT KIT, FAST CHARGE KIT WITH Y HARNESS, HIGH-LIFT BLADE KIT, OCDB KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, FRONT WEIGHT KIT |   |                 |                          |                 |                        |                 |

See your professional Gravelly® dealer for complete warranty details.



| <b>PRO-STANCE® EV</b>  | <b>48SD</b>  | <b>48RD</b>   | <b>52SD</b>   | <b>52RD</b>   | <b>60SD</b>   | <b>60RD</b>   |
|--|--|---------------|---------------|---------------|---------------|---------------|
| <b>MODEL NUMBER</b>  | <b>998001</b>  | <b>998004</b> | <b>998002</b> | <b>998005</b> | <b>998003</b> | <b>998006</b> |
| <b>BATTERIES</b>   | 4 - 16 KWH FUSION CORE LITHIUM ION   |               |               |               |               |               |
| <b>SPINDLE MOTORS</b>  | 5 KW PER MOTOR   |               |               |               |               |               |
| <b>DRIVE SYSTEM</b>  | PROPRIETARY ELECTRIC TRANSAXLES  |               |               |               |               |               |
| <b>GROUND SPEED (Forward/Reverse)</b>  | 8 MPH / 4MPH (LOW SPEED) – 11 MPH / 5.5 MPH (HIGH SPEED)   |               |               |               |               |               |
| <b>DECK</b>  |  |               |               |               |               |               |
| <b>DECK MATERIAL</b>   | 7 GA. STEEL  |               |               |               |               |               |
| <b>DECK CONSTRUCTION</b>   | X-FACTOR® 3 DECK   |               |               |               |               |               |
| <b>NUMBER OF SPINDLES</b>  | 3  |               |               |               |               |               |
| <b>BLADE TIP SPEED (FPM)</b>   | 18,000   |               |               |               |               |               |
| <b>SPINDLE HOUSING MATERIAL</b>  | CAST ALUMINUM  |               |               |               |               |               |
| <b>SPINDLE BEARINGS</b>  | SERVICEABLE BOTTOM BEARING   |               |               |               |               |               |
| <b>DECK ENGAGEMENT</b>   | ELECTRIC DC BRUSHLESS MOTORS   |               |               |               |               |               |
| <b>CUTTING WIDTH</b>   | 48 IN.   |               | 52 IN.        |               | 60 IN.        |               |
| <b>DISCHARGE</b>   | SIDE   | REAR          | SIDE          | REAR          | SIDE          | REAR          |
| <b>CUTTING HEIGHTS</b>   | 1.5 IN. - 5.0 IN.  |               |               |               |               |               |
| <b>CUTTING POSITIONS</b>   | 15   |               |               |               |               |               |
| <b>WHEELS</b>  |  |               |               |               |               |               |
| <b>FRONT AXLE</b>  | FIXED, GREASABLE CASTER FORK TUBES   |               |               |               |               |               |
| <b>FRONT</b>   | SMOOTH 13 X 6.5-6 SEMI-PNEUMATIC   |               |               |               |               |               |
| <b>REAR</b>  | 20 X 10.5-8 TURF   |               |               |               |               |               |
| <b>MACHINE</b>   |  |               |               |               |               |               |
| <b>WEIGHT</b>  | 1204 LBS.  | 1203 LBS.     | 1240 LBS.     | 1236 LBS.     | 1265 LBS.     | 1264 LBS.     |
| <b>LENGTH</b>  | 74.5 IN.   | 74.5 IN.      | 74.5 IN.      | 74.5 IN.      | 74.5 IN.      | 74.5 IN.      |
| <b>WIDTH (w/o CHUTE)</b>   | 50 IN.   | 50 IN.        | 56 IN.        | 54 IN.        | 63 IN.        | 62 IN.        |
| <b>WIDTH (w/ CHUTE)</b>  | 62 IN.   | 50 IN.        | 67 IN.        | 54 IN.        | 75 IN.        | 62 IN.        |
| <b>HEIGHT</b>  | 46.0 IN.   |               |               |               |               |               |
| <b>WARRANTY</b>  |  |               |               |               |               |               |
| <b>UNIT</b>  | 5 YEAR/1500 HOUR COMMERCIAL/3 YEAR BATTERY- SEE YOUR PROFESSIONAL GRAVELY DEALER FOR COMPLETE WARRANTY DETAILS |               |               |               |               |               |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>   |  |               |               |               |               |               |
| MULCHING KIT, OCDB KIT, HEADLIGHT KIT, TRIMMER MOUNT KIT, PACK BLOWER MOUNT KIT, BUCKET MOUNT KIT, REAR TWEEL KIT, HIGH LIFT BLADES, BEACON LIGHT KIT, GRASS CATCHER |  |               |               |               |               |               |

See your professional Gravelly® dealer for complete warranty details.



| <b>PRO-STANCE®</b>   |   |               |                  |                            |                  |                      |                  |                      |
|--|---|---------------|------------------|----------------------------|------------------|----------------------|------------------|----------------------|
|  | <b>32</b>   | <b>36</b>     | <b>48</b>        | <b>52</b>                  | <b>52</b>        | <b>60</b>            | <b>60</b>        |                      |
| <b>MODEL NUMBER</b>  | <b>994157</b>   | <b>994149</b> | <b>994161</b>    | <b>994162</b>              | <b>994163</b>    | <b>994164</b>        | <b>994165</b>    |                      |
| <b>ENGINE</b>  | KAWASAKI® FS600V  |               | KAWASAKI® FS600V | KAWASAKI® FX730V           | KAWASAKI® FX730V | KAWASAKI® FT730V-EFI | KAWASAKI® FX730V | KAWASAKI® FT730V-EFI |
| <b>HORSEPOWER</b>  | 18.5  |               | 23.5 HP          | 23.5 HP                    | 26 HP            | 23.5 HP              | 26 HP            |                      |
| <b>DISPLACEMENT</b>  | 603 CC  |               | 726 CC           | 726 CC                     | 726 CC           | 726 CC               | 726 CC           |                      |
| <b>DRIVE SYSTEM</b>  | HYDRO-GEAR® ZT-3100   |               |                  | HYDRO-GEAR® ZT-3400        |                  |                      |                  |                      |
| <b>FUEL CAPACITY</b>   | 6 GAL   |               |                  | 9 GAL                      |                  |                      |                  |                      |
| <b>GROUND SPEED (Forward/Reverse)</b>  | 8 MPH / 3 MPH   |               |                  | 9 MPH / 4 MPH              |                  |                      |                  |                      |
| <b>DECK</b>  |   |               |                  |                            |                  |                      |                  |                      |
| <b>DECK MATERIAL</b>   | 7 GA.   |               |                  |                            |                  |                      |                  |                      |
| <b>DECK CONSTRUCTION</b>   | FABRICATED  |               |                  |                            |                  |                      |                  |                      |
| <b>NUMBER OF SPINDLES</b>  | 2   |               |                  | 3                          |                  |                      |                  |                      |
| <b>BLADE TIP SPEED (FPM)</b>   | 18,220  |               |                  | 18,000                     |                  |                      |                  |                      |
| <b>SPINDLE HOUSING MATERIAL</b>  | FORGED ALUMINUM   |               |                  |                            |                  |                      |                  |                      |
| <b>SPINDLE BEARINGS</b>  | BALL BEARING  |               |                  |                            |                  |                      |                  |                      |
| <b>DECK ENGAGEMENT</b>   | OGURA 2.75 ELECTRIC CLUTCH  |               |                  |                            |                  |                      |                  |                      |
| <b>DECK LIFT SYSTEM</b>  | MANUAL  |               |                  |                            |                  |                      |                  |                      |
| <b>CUTTING WIDTH</b>   | 32 IN.  | 36 IN.        | 48 IN.           | 52 IN.                     | 52 IN.           | 60 IN.               | 60 IN.           |                      |
| <b>CUTTING HEIGHTS</b>   | 1.5 IN. - 5.0 IN.   |               |                  |                            |                  |                      |                  |                      |
| <b>CUTTING POSITIONS</b>   | 15  |               |                  |                            |                  |                      |                  |                      |
| <b>WHEELS</b>  |   |               |                  |                            |                  |                      |                  |                      |
| <b>FRONT AXLE</b>  | RIGID   |               |                  |                            |                  |                      |                  |                      |
| <b>FRONT</b>   | 11 X 4.00-5 SEMI-PNEUMATIC  |               |                  | 13 X 6.50-6 SEMI-PNEUMATIC |                  |                      |                  |                      |
| <b>REAR</b>  | 36": 18 X 8.50-8 RADIAL   |               |                  | 20 X 10.50 - 8 RADIAL      |                  |                      |                  |                      |
| <b>MACHINE</b>   |   |               |                  |                            |                  |                      |                  |                      |
| <b>WEIGHT</b>  | 750 LBS.  | 784 LBS.      | 995 LBS.         | 1015 LBS.                  | 1015 LBS.        | 1043 LBS.            | 1048 LBS.        |                      |
| <b>LENGTH</b>  | 59.5 IN.  | 59.5 IN.      | 60.63 IN.        | 60.63 IN.                  | 60.63 IN.        | 62 IN.               | 62 IN.           |                      |
| <b>WIDTH (w/o CHUTE)</b>   | 33.5 IN.  | 36.5 IN.      | 50 IN.           | 55.5 IN.                   | 55.5 IN.         | 63 IN.               | 63 IN.           |                      |
| <b>WIDTH (w/ CHUTE)</b>  | 49 IN.  | 49 IN.        | 62.25 IN.        | 67.75 IN.                  | 67.75 IN.        | 75.25 IN.            | 75.25 IN.        |                      |
| <b>HEIGHT</b>  | 48 IN.  |               |                  |                            |                  |                      |                  |                      |
| <b>WARRANTY</b>  |   |               |                  |                            |                  |                      |                  |                      |
| <b>UNIT</b>  | 5 YEAR / 1000 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |               |                  |                            |                  |                      |                  |                      |
| <b>DECK SHELL &amp; FRAME</b>  | LIMITED LIFETIME  |               |                  |                            |                  |                      |                  |                      |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>   |   |               |                  |                            |                  |                      |                  |                      |
| MULCHING KIT, OCDB KIT, HEADLIGHT KIT, TRIMMER MOUNT KIT, PACK BLOWER MOUNT KIT, BUCKET MOUNT KIT, REAR TWEEL KIT, LASEREDGE BLADES, TUNE UP KIT |   |               |                  |                            |                  |                      |                  |                      |

See your professional Gravelly® dealer for complete warranty details.



**Z-STANCE®****32****48****52**

| <b>MODEL NUMBER</b>                   | <b>994160</b>                | <b>994159</b>     | <b>994158</b> |
|---------------------------------------|------------------------------|-------------------|---------------|
| <b>ENGINE</b>                         | KAWASAKI® FS600V             | KAWASAKI® FS65 V  |               |
| <b>HORSEPOWER</b>                     | 18.5 HP                      | 22 HP             |               |
| <b>DISPLACEMENT</b>                   | 603 CC                       | 726 CC            |               |
| <b>DRIVE SYSTEM</b>                   | HYDRO-GEAR® ZT-3100          |                   |               |
| <b>FUEL CAPACITY</b>                  | 4.5 GAL.                     |                   |               |
| <b>GROUND SPEED (Forward/Reverse)</b> | 7 MPH / 3 MPH                |                   |               |
| <b>DECK</b>                           |                              |                   |               |
| <b>DECK MATERIAL</b>                  | 7 GA.                        | 10 GA.            |               |
| <b>DECK CONSTRUCTION</b>              | X-FACTOR® II                 | X-FACTOR® 3       |               |
| <b>NUMBER OF SPINDLES</b>             | 2                            | 3                 |               |
| <b>BLADE TIP SPEED (FPM)</b>          | 18,000                       | 18,000            | 18,000        |
| <b>SPINDLE HOUSING MATERIAL</b>       | FORGED ALUMINUM              |                   |               |
| <b>SPINDLE SHAFT</b>                  | STEEL                        |                   |               |
| <b>SPINDLE BEARINGS</b>               | BALL BEARING                 |                   |               |
| <b>DECK ENGAGEMENT</b>                | ELECTRIC CLUTCH              |                   |               |
| <b>DECK LIFT SYSTEM</b>               | MANUAL                       |                   |               |
| <b>CUTTING WIDTH</b>                  | 32 IN.                       | 48 IN.            | 52 IN.        |
| <b>CUTTING HEIGHTS</b>                | 2.0 IN. - 5.0 IN.            | 1.5 IN. - 5.0 IN. |               |
| <b>CUTTING POSITIONS</b>              | 13                           | 15                |               |
| <b>WHEELS</b>                         |                              |                   |               |
| <b>FRONT</b>                          | 11 X 5-6 PNEUMATIC           |                   |               |
| <b>REAR</b>                           | 20 X 6.50 - 8 TURF           |                   |               |
| <b>MACHINE</b>                        |                              |                   |               |
| <b>WEIGHT</b>                         | 669 LBS.                     | 744 LBS.          | 763 LBS.      |
| <b>LENGTH</b>                         | 65.5 IN.                     | 65.5 IN.          | 65.5 IN.      |
| <b>WIDTH (w/o CHUTE)</b>              | 32.8 IN.                     | 49.5 IN.          | 55 IN.        |
| <b>WIDTH (w/ CHUTE)</b>               | 44.8 IN.                     | 61 IN.            | 66.75 IN.     |
| <b>HEIGHT</b>                         | 47.5 IN.                     |                   |               |
| <b>WARRANTY</b>                       |                              |                   |               |
| <b>UNIT</b>                           | 4 YEAR / 500 HOUR COMMERCIAL |                   |               |

**ATTACHMENTS & ACCESSORIES**

MULCHING KIT, OPERATOR CONTROLLED DISCHARGE BAFFLE, HEADLIGHT KIT, TWEEL KIT, BLADE KIT, GRASS CATCHER

See your professional Gravelly® dealer for complete warranty details.



# PRO-WALK®

36

48

52

60

| MODEL NUMBER                           | 988184  | 988185           | 988186           | 988187           |
|--|---|------------------|------------------|------------------|
| ENGINE                                 | KAWASAKI® FS481V                                | KAWASAKI® FS600V | KAWASAKI® FS600V | KAWASAKI® FS691V |
| HORSEPOWER                             | 14.5 HP   | 18.5 HP          | 18.5 HP          | 23 HP            |
| DISPLACEMENT                           | 603 CC  | 603 CC           | 603 CC           | 726 CC           |
| DRIVE SYSTEM                           | HYDRO-GEAR® ZT-2800                             |                  |                  |                  |
| FUEL CAPACITY                          | 5.8 GAL.  |                  |                  |                  |
| GROUND SPEED (Forward/Reverse)         | 8 MPH / 3 MPH                                   |                  |                  |                  |
| <b>DECK</b>                            |   |                  |                  |                  |
| DECK MATERIAL                          | 10 GA.  |                  |                  |                  |
| DECK CONSTRUCTION                      | FABRICATED                                      |                  |                  |                  |
| NUMBER OF SPINDLES                     | 2   | 3                | 3                | 3                |
| BLADE TIP SPEED (FPM)                  | 18,000  |                  |                  |                  |
| SPINDLE HOUSING MATERIAL               | FORGED ALUMINUM                                 |                  |                  |                  |
| SPINDLE BEARINGS                       | BALL BEARING                                    |                  |                  |                  |
| DECK ENGAGEMENT                        | OGURA GT1A CLUTCH                               |                  |                  |                  |
| DECK LIFT SYSTEM                       | MANUAL  |                  |                  |                  |
| CUTTING WIDTH                          | 36 IN   | 48 IN            | 52 IN.           | 60 IN.           |
| CUTTING HEIGHTS                        | 1.5 IN - 4.5 IN                                 | 1.5 IN - 5.0 IN  | 1.5 IN - 5.0 IN  | 1.5 IN - 5.0 IN  |
| CUTTING POSITIONS (1/4 IN. Increments) | 13  | 15               | 15               | 15               |
| <b>WHEELS</b>                          |   |                  |                  |                  |
| FRONT AXLE                             | N/A   |                  |                  |                  |
| FRONT WHEELS                           | 11 X 4-5 SEMI-PNEUMATIC                         |                  |                  |                  |
| REAR WHEELS                            | 21 X 7-10                                       |                  | 20 X 8-10        |                  |
| <b>MACHINE</b>                         |   |                  |                  |                  |
| WEIGHT                                 | 701 LBS   | 740 LBS          | 770 LBS          | 795 LBS          |
| LENGTH                                 | 64 IN   | 69 IN            | 71 IN            | 71.8 IN          |
| WIDTH (w/o CHUTE)                      | 36.8 IN   | 50.1 IN          | 55.5 IN          | 63 IN            |
| WIDTH (w/ CHUTE)                       | 48.3 IN   | 62.2 IN          | 67.6 IN          | 75.1 IN          |
| HEIGHT                                 | 45 IN   |                  |                  |                  |
| <b>WARRANTY</b>                        |   |                  |                  |                  |
| UNIT                                   | 4 YEAR / 750 HOUR - NO HOUR LIMIT FIRST 2 YEARS |                  |                  |                  |
| DECK SHELL & FRAME                     | N/A   |                  |                  |                  |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>   |   |                  |                  |                  |

MULCHING KIT, GRASS COLLECTOR, SINGLE WHEEL SULKY, TWO WHEEL SULKY, HEADLIGHT KIT, OCDB KIT, LASEREDGE BLADE KIT

See your professional Gravelly® dealer for complete warranty details.



| <b>ZT X</b>   |  |   |                  |               |                  |
|---|--|---|------------------|---------------|------------------|
|   | <b>42</b>  | <b>42</b>                                   | <b>48</b>        | <b>52</b>     | <b>52</b>        |
| <b>MODEL NUMBER</b>   | <b>918007</b>  | <b>918008</b>                               | <b>918009</b>    | <b>918010</b> | <b>918011</b>    |
| <b>ENGINE</b>   | KOHLER® KT730  | KAWASAKI® FR651V                            | KAWASAKI® FR651V | KOHLER® KT730 | KAWASAKI® FR691V |
| <b>HORSEPOWER</b>   | 23 HP  | 21.5 HP                                     | 21.5 HP          | 23 HP         | 23 HP            |
| <b>DISPLACEMENT</b>   | 725 CC   | 726 CC                                      | 726 CC           | 725 CC        | 726 CC           |
| <b>DRIVE SYSTEM</b>   | HYDRO-GEAR® SERVICEABLE EZT® TRANSAXLES  |   |                  |               |                  |
| <b>FUEL CAPACITY</b>  | 3.5 GAL  |   |                  |               |                  |
| <b>GROUND SPEED (Forward/Reverse)</b>   | 7 MPH / 3 MPH  |   |                  |               |                  |
| <b>DECK</b>   |  |   |                  |               |                  |
| <b>DECK MATERIAL</b>  | 11 GA. STEEL   |   |                  |               |                  |
| <b>DECK CONSTRUCTION</b>  | FABRICATED X-FACTOR®   |   |                  |               |                  |
| <b>NUMBER OF SPINDLES</b>   | 3  |   |                  |               |                  |
| <b>BLADE TIP SPEED (FPM)</b>  | 18,000   |   |                  |               |                  |
| <b>SPINDLE HOUSING MATERIAL</b>   | FORGED ALUMINUM  |   |                  |               |                  |
| <b>DECK ENGAGEMENT</b>  | ELECTRIC WARNER  |   |                  |               |                  |
| <b>DECK LIFT SYSTEM</b>   | FOOT OPERATED  |   |                  |               |                  |
| <b>CUTTING WIDTH</b>  | 42 IN.   | 42 IN.                                      | 48 IN.           | 52 IN.        | 52 IN.           |
| <b>CUTTING HEIGHT</b>   | 1.5 IN. - 4.5 IN.  |   |                  |               |                  |
| <b>CUTTING POSITIONS</b>  | 13   |   |                  |               |                  |
| <b>WHEELS</b>   |  |   |                  |               |                  |
| <b>FRONT</b>  | 11 X 6 - 5 SMOOTH PNEUMATIC  |   |                  |               |                  |
| <b>REAR</b>   | 20 X 8 - 8 K808 AGGRESIVE TREAD TURF TIRES   | 20 X 10 - 8 K808 AGGRESIVE TREAD TURF TIRES |                  |               |                  |
| <b>FEATURES</b>   |  |   |                  |               |                  |
| <b>SEAT</b>   | 22 IN. PLUSH HIGH BACK W/ARM RESTS & SEAT SLIDER STANDARD                                  |   |                  |               |                  |
| <b>CONTROL ARMS</b>   | TOOLLESS QUICK ADJUST  |   |                  |               |                  |
| <b>LIGHTING</b>   | DUAL HIGH INTENSITY LED  |   |                  |               |                  |
| <b>USB PORT</b>   | DUAL USB-A   |   |                  |               |                  |
| <b>FLOOR PLATE</b>  | TOOLLESS FLIP UP WITH ACCESSORY TRAY   |   |                  |               |                  |
| <b>HOUR METER</b>   | STANDARD   |   |                  |               |                  |
| <b>MACHINE</b>  |  |   |                  |               |                  |
| <b>WEIGHT</b>   | 669 LBS.   | 667 LBS.                                    | 679 LBS.         | 691 LBS.      | 695 LBS.         |
| <b>LENGTH</b>   | 74.5 IN.   | 74.5 IN.                                    | 74.5 IN.         | 74.5 IN.      | 74.5 IN.         |
| <b>WIDTH (w/o CHUTE)</b>  | 45.1 IN.   | 45.1 IN.                                    | 51.1 IN.         | 55.6 IN.      | 55.6 IN.         |
| <b>WIDTH (w/ CHUTE)</b>   | 56.2 IN.   | 56.2 IN.                                    | 62.3 IN.         | 66.7 IN.      | 66.7 IN.         |
| <b>HEIGHT</b>   | 46 IN.   |   |                  |               |                  |
| <b>WARRANTY</b>   |  |   |                  |               |                  |
| <b>UNIT</b>   | 3 YEARS OR 300 HOURS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |   |                  |               |                  |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>  |  |   |                  |               |                  |
| 2-BUCKET NON-POWERED BAGGER, POWERED BAGGER CONVERSION KIT, MULCH KIT, SEAT ISOLATOR KIT, TRAILER HITCH KIT, LAWN STRIPING KIT, DECK LIFT SPRING ASSIST KIT, TRANSPORT LOCK KIT, TOOL HOLDER, KICK MAT, 8" WHEEL COVERS, EQUIPMENT COVER, SEAT COVER, CAMO SEAT COVER, LASEREDGE BLADE KIT, ENTRY ASSIST HANDLE KIT, KAWASAKI TUNE UP KIT, KOHLER TUNE UP KIT |  |   |                  |               |                  |

See your professional Gravelly® dealer for complete warranty details.



| ZT XL   | 42   | 48   | 52                   | 52               | 60               |
|---|--|--|----------------------|------------------|------------------|
| MODEL NUMBER  | 918012   | 918013                                       | 918014               | 918015           | 918016           |
| ENGINE  | KAWASAKI® FR651V   | KAWASAKI® FR691V                             | KOHLER® KT740 SERIES | KAWASAKI® FR691V | KAWASAKI® FR730V |
| HORSEPOWER  | 21.5 HP  | 23 HP  | 25 HP                | 23 HP            | 24 HP            |
| DISPLACEMENT  | 726 CC   | 726 CC                                       | 725 CC               | 726 CC           | 726 CC           |
| DRIVE SYSTEM  | HYDRO-GEAR® ZT-2800® TRANSAXLES  |  |                      |                  |                  |
| FUEL CAPACITY   | 3.5 GAL  |  |                      |                  |                  |
| GROUND SPEED (Forward/Reverse)  | 7 MPH / 3 MPH  |  |                      |                  |                  |
| <b>DECK</b>   |  |  |                      |                  |                  |
| DECK MATERIAL   | 11 GA. STEEL   |  |                      |                  |                  |
| DECK CONSTRUCTION   | FABRICATED X-FACTOR®   |  |                      |                  |                  |
| NUMBER OF SPINDLES  | 3  |  |                      |                  |                  |
| BLADE TIP SPEED (FPM)   | 18,000   |  |                      |                  |                  |
| SPINDLE HOUSING MATERIAL  | FORGED ALUMINUM  |  |                      |                  |                  |
| DECK ENGAGEMENT   | ELECTRIC WARNER  |  |                      |                  |                  |
| DECK LIFT SYSTEM  | FOOT OPERATED  |  |                      |                  |                  |
| CUTTING WIDTH   | 42 IN.   | 48 IN.                                       | 52 IN.               | 52 IN.           | 60 IN.           |
| CUTTING HEIGHT  | 1.5 IN. - 4.5 IN.  |  |                      |                  |                  |
| CUTTING POSITIONS   | 13   |  |                      |                  |                  |
| <b>WHEELS</b>   |  |  |                      |                  |                  |
| FRONT   | 11 X 6 - 5 SMOOTH PNEUMATIC  |  |                      |                  |                  |
| REAR  | 20 X 8 - 8 K3012 AGGRESIVE TREAD TURF TIRES  | 20 X 10 - 8 K3012 AGGRESIVE TREAD TURF TIRES |                      |                  |                  |
| <b>FEATURES</b>   |  |  |                      |                  |                  |
| SEAT  | 22 IN PLUSH HIGH BACK W/ PADDED ARM RESTS AND SEAT ISOLATION                               |  |                      |                  |                  |
| CONTROL ARMS  | TOOL-LESS QUICK ADJUST   |  |                      |                  |                  |
| LIGHTING  | DUAL HIGH INTENSITY LED  |  |                      |                  |                  |
| USB PORT  | DUAL USB-A   |  |                      |                  |                  |
| FLOOR PLATE   | TOOL- LESS FLIP UP WITH ACCESSORY TRAY   |  |                      |                  |                  |
| HOURLY METER  | STANDARD   |  |                      |                  |                  |
| <b>MACHINE</b>  |  |  |                      |                  |                  |
| WEIGHT  | 675 LBS  | 689 LBS                                      | 701 LBS              | 705 LBS          | 725 LBS          |
| LENGTH  | 74.5 IN.   | 74.5 IN.                                     | 74.5 IN.             | 74.5 IN.         | 74.5 IN.         |
| WIDTH (w/o CHUTE)   | 45.1 IN.   | 51.1 IN.                                     | 55.6 IN.             | 55.6 IN.         | 63.1 IN.         |
| WIDTH (w/ CHUTE)  | 56.2 IN.   | 62.3 IN.                                     | 66.7 IN.             | 66.7 IN.         | 74.2 IN.         |
| HEIGHT  | 47 IN.   |  |                      |                  |                  |
| <b>WARRANTY</b>   |  |  |                      |                  |                  |
| UNIT  | 4 YEARS OR 400 HOURS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |  |                      |                  |                  |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>  |  |  |                      |                  |                  |
| 2-BUCKET NON-POWERED BAGGER, POWERED BAGGER CONVERSION KIT, MULCH KIT, SEAT ISOLATOR KIT, TRAILER HITCH KIT, LAWN STRIPING KIT, DECK LIFT SPRING ASSIST KIT, TRANSPORT LOCK KIT, TOOL HOLDER, KICK MAT, 8" WHEEL COVERS, EQUIPMENT COVER, SEAT COVER, CAMO SEAT COVER, LASEREDGE BLADE KIT, ENTRY ASSIST HANDLE KIT, KAWASAKI TUNE UP KIT, KOHLER TUNE UP KIT |  |  |                      |                  |                  |

See your professional Gravelly® dealer for complete warranty details.

| <b>ZT HD</b>   | <b>44</b>  | <b>48</b>        | <b>48</b>         | <b>52</b>        | <b>52</b>       | <b>60</b>        | <b>60</b>     |
|--|--|------------------|-------------------|------------------|-----------------|------------------|---------------|
| <b>MODEL NUMBER</b>  | <b>991266</b>  | <b>991268</b>    | <b>991274</b>     | <b>991270</b>    | <b>991276</b>   | <b>991272</b>    | <b>991278</b> |
| <b>ENGINE</b>  | KAWASAKI® FR651V   | KAWASAKI® FR691V | KOHLER® KT740     | KAWASAKI® FR691V | KOHLER® KT740   | KAWASAKI® FR730V | KOHLER® KT745 |
| <b>HORSEPOWER</b>  | 21.5 HP  | 23 HP            | 25 HP             | 23 HP            | 25 HP           | 24 HP            | 26 HP         |
| <b>DISPLACEMENT</b>  | 726 CC   | 726 CC           | 725 CC            | 726 CC           | 725 CC          | 726 CC           | 725 CC        |
| <b>DRIVE SYSTEM</b>  | HYDRO-GEAR® ZT-3100® TRANSAXLES  |                  |                   |                  |                 |                  |               |
| <b>FUEL CAPACITY</b>   | 5.0 GAL.   |                  |                   |                  |                 |                  |               |
| <b>GROUND SPEED (Forward/Reverse)</b>  | 8 MPH / 4 MPH  |                  |                   |                  |                 |                  |               |
| <b>DECK</b>  |  |                  |                   |                  |                 |                  |               |
| <b>DECK MATERIAL</b>   | 10 GA.   |                  |                   |                  |                 |                  |               |
| <b>DECK CONSTRUCTION</b>   | FABRICATED X-FACTOR® 3   |                  |                   |                  |                 |                  |               |
| <b>NUMBER OF SPINDLES</b>  | 3  |                  |                   |                  |                 |                  |               |
| <b>BLADE TIP SPEED (FPM)</b>   | 18,576   | 18,576           | 18,576            | 18,136           | 18,136          | 18,464           | 18,464        |
| <b>SPINDLE HOUSING MATERIAL</b>  | FORGED ALUMINUM  |                  |                   |                  |                 |                  |               |
| <b>SPINDLE BEARINGS</b>  | BALL BEARING   |                  |                   |                  |                 |                  |               |
| <b>DECK ENGAGEMENT</b>   | ELECTRIC WARNER  |                  |                   |                  |                 |                  |               |
| <b>DECK LIFT SYSTEM</b>  | FOOT OPERATED  |                  |                   |                  |                 |                  |               |
| <b>CUTTING WIDTH</b>   | 44 IN.   | 48 IN.           | 48 IN.            | 52 IN.           | 52 IN.          | 60 IN.           | 60 IN.        |
| <b>CUTTING HEIGHT</b>  | 1.5 IN. - 5.0 IN.  |                  |                   |                  |                 |                  |               |
| <b>CUTTING POSITIONS</b>   | 15   |                  |                   |                  |                 |                  |               |
| <b>WHEELS</b>  |  |                  |                   |                  |                 |                  |               |
| <b>FRONT</b>   | 13 X 6.5-6 SMOOTH PNEUMATIC  |                  |                   |                  |                 |                  |               |
| <b>REAR</b>  | 22 X 10-12 TURF  |                  | 22 X 10.5-12 TURF |                  | 22 X 12-12 TURF |                  |               |
| <b>FEATURES</b>  |  |                  |                   |                  |                 |                  |               |
| <b>SEAT</b>  | HIGH BACK COMFORT W/ SEAT ISOLATION & PADDED ARM RESTS                                     |                  |                   |                  |                 |                  |               |
| <b>HOURLY METER</b>  | STANDARD   |                  |                   |                  |                 |                  |               |
| <b>MACHINE</b>   |  |                  |                   |                  |                 |                  |               |
| <b>WEIGHT</b>  | 794 LBS.   | 802 LBS.         | 796 LBS.          | 817 LBS.         | 804 LBS.        | 841 LBS.         | 843 LBS.      |
| <b>LENGTH</b>  | 79 IN.   | 79 IN.           | 79 IN.            | 79 IN.           | 79 IN.          | 79 IN.           | 79 IN.        |
| <b>WIDTH (w/o CHUTE)</b>   | 47.6 IN.   | 50.8 IN.         | 50.8 IN.          | 56.2 IN.         | 56.2 IN.        | 63.7 IN.         | 63.7 IN.      |
| <b>WIDTH (w/ CHUTE)</b>  | 58.8 IN.   | 61.9 IN.         | 61.9 IN.          | 67.3 IN.         | 67.3 IN.        | 74.8 IN.         | 74.8 IN.      |
| <b>HEIGHT</b>  | 47 IN.   |                  |                   |                  |                 |                  |               |
| <b>WARRANTY</b>  |  |                  |                   |                  |                 |                  |               |
| <b>UNIT</b>  | 4 YEARS OR 500 HOURS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS |                  |                   |                  |                 |                  |               |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>   |  |                  |                   |                  |                 |                  |               |
| SEAT SPRING KIT, FOLDING ROPS KIT, TRAILER HITCH KIT, POWERED BAGGER KIT, LOWER ROPS BAGGER MOUNT, OCDB KIT, MULCHING KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, SUSPENSION SEAT KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT |  |                  |                   |                  |                 |                  |               |

See your professional Gravelly® dealer for complete warranty details.



# ZT HD STEALTH®

52

|                                       |   |
|---------------------------------------|---|
| <b>MODEL NUMBER</b>                   | <b>991271</b>   |
| <b>ENGINE</b>                         | KAWASAKI® FR691V  |
| <b>HORSEPOWER</b>                     | 23 HP   |
| <b>DISPLACEMENT</b>                   | 726 CC  |
| <b>DRIVE SYSTEM</b>                   | HYDRO-GEAR® ZT-3100® TRANSAXLES   |
| <b>FUEL CAPACITY</b>                  | 5.0 GAL.  |
| <b>GROUND SPEED (Forward/Reverse)</b> | 8 MPH / 4 MPH   |
| <b>DECK</b>                           |   |
| <b>DECK MATERIAL</b>                  | 10 GA.  |
| <b>DECK CONSTRUCTION</b>              | FABRICATED X-FACTOR® 3  |
| <b>NUMBER OF SPINDLES</b>             | 3   |
| <b>BLADE TIP SPEED (FPM)</b>          | 18,136  |
| <b>SPINDLE HOUSING MATERIAL</b>       | FORGED ALUMINUM   |
| <b>SPINDLE BEARINGS</b>               | BALL BEARING  |
| <b>DECK ENGAGEMENT</b>                | ELECTRIC WARNER   |
| <b>DECK LIFT SYSTEM</b>               | FOOT OPERATED   |
| <b>CUTTING WIDTH</b>                  | 52 IN.  |
| <b>CUTTING HEIGHT</b>                 | 1.5 IN. - 5.0 IN.   |
| <b>CUTTING POSITIONS</b>              | 15  |
| <b>WHEELS</b>                         |   |
| <b>FRONT</b>                          | 13 X 6.5-6 SMOOTH PNEUMATIC   |
| <b>REAR</b>                           | 22 X 11 - 10 KENDA 3012 AGGRESSIVE TREAD TURF   |
| <b>FEATURES</b>                       |   |
| <b>SEAT</b>                           | HIGH BACK, ONE OF A KIND SEAT BUILT FOR COMFORT INCLUDING SEAT ISOLATION AND PADDED ARM RESTS |
| <b>HOUR METER</b>                     | STANDARD  |
| <b>MACHINE</b>                        |   |
| <b>WEIGHT</b>                         | 819 LBS.  |
| <b>LENGTH</b>                         | 79 IN.  |
| <b>WIDTH (w/o CHUTE)</b>              | 56.2 IN.  |
| <b>WIDTH (w/ CHUTE)</b>               | 67.3 IN.  |
| <b>HEIGHT</b>                         | 47 IN.  |
| <b>WARRANTY</b>                       |   |
| <b>UNIT</b>                           | 4 YEARS OR 500 HOURS - SEE YOUR PROFESSIONAL GRAVELY® DEALER FOR COMPLETE WARRANTY DETAILS    |

## ATTACHMENTS & ACCESSORIES

SEAT SPRING KIT, FOLDING ROPS KIT, TRAILER HITCH KIT, POWERED BAGGER KIT, LOWER ROPS BAGGER MOUNT, OCDB KIT, MULCHING KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, SUSPENSION SEAT KIT, FRONT CASTOR SUSPENSION FORKS, REAR TWEEL KIT, SEMI-PNEUMATIC FRONT TIRE KIT, AGGRESSIVE TIRE KIT, WHEEL COVER KIT, LASEREDGE BLADES, TUNE UP KIT

See your professional Gravelly® dealer for complete warranty details.





# WE CUT FINANCING WORRIES DOWN TO SIZE.

We build mowers to mow, not sit on a showroom floor. That's why we provide financing options to make sure these machines are out there working. We have a network of authorized independent finance companies with affordable finance plans. Don't settle for an inferior product. Do the job right with a Gravelly.

VISIT YOUR LOCAL DEALER TO LEARN MORE.





VISIT US ONLINE AT GRAVELY.COM



Registered trademark and ™ trademark of AriensCo. Kohler®, Kawasaki®, Yamaha®, Subaru® and Hydro-Gear® are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit [www.gravelly.com](http://www.gravelly.com) for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary. © Copyright 2023 AriensCo. All rights reserved. 2023

**GRAVELLY**