

# EXCAVATOR MULCHERS

## PML/HY



from 16 to 40 L/min



Ø4 cm max



from 1,5 to 3,5 t

### MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

FAE's smallest excavator mulcher is designed for cleaning up brambles and shrubs.

This mulcher can be equipped with a standard 8cc or optional 16cc motor for mounting on excavators ranging from 1.3 to 3.5 tons.




#### STANDARD EQUIPMENT

- Enclosed machine body
- Belt transmission
- 8cc gear motor with integrated anticavitation valve - (16 - 20 L/min)
- Hydraulic hoses
- Welded counter blade
- Rear roller
- Self leveling protection rubber
- Possibility to have the rotor equipped with PML hammers or Y-fails

#### OPTIONS

- 16cc gear motor with integrated anticavitation valve - (35 - 40 L/min)
- Customized attachment bracket
- Attachment plate with self leveling device
- Multiple tooth options

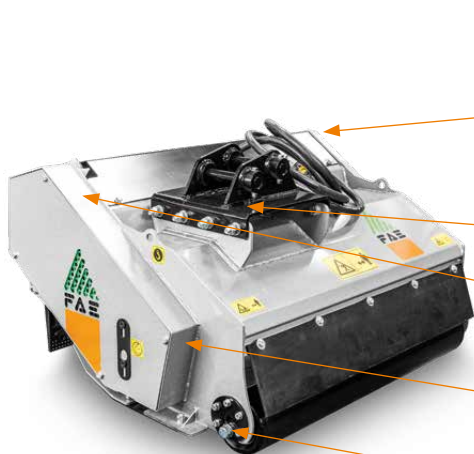

**Attachment plate with self leveling device** (optional)  
to adapt to all types of terrain

**Customized attachment bracket** (optional)

**Enclosed machine body**

**Steel counter-blades** helps mulch material into a smaller final size

**Self-cleaning support roller**

MODEL	Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max				PML	Y
PML/HY 50	16	20	150	210	1,5	3,5	500	180	40	8	8
PML/HY 70	16	20	150	210	2,0	3,5	700	195	40	10	10
PML/HY 90	16	20	150	210	2,5	3,5	900	210	40	14	14

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.