

**NEW**

EXCAVATOR MULCHERS

**BL2/EX/VT**



from 100 to 140 L/min



Ø 15 cm max



from 8 to 14 t


**FORESTRY MULCHER WITH BITE LIMITER TECHNOLOGY.**

The BL2/EX/VT, designed for excavators from 8 to 14 t will mulch logs up to a diameter of 15 cm and is available in two working widths (100 cm and 125 cm). It has a hydraulic piston motor with VT (variable torque) automatic displacement, significantly improving performance, increasing torque when necessary, and minimizing rotor stalling conditions. The rotor lies at the heart of this mulcher, and is equipped with a heat-treated forged steel tooth holder, for use with two different FAE teeth: the type E blade (reversible model) and the E/HD (Heavy Duty). Next-level functionality is guaranteed by Bite Limiter technology: special profiles in “Hardox” wear-resistant steel fitted near the teeth limit the depth of action of blades, guaranteeing optimum power management and exceptional performance. The hydraulic thumb is one of the available options, useful in managing and moving the material to be mulched to the ground.

| STANDARD EQUIPMENT   |
|--|
| 55/38cc variable torque hydraulic piston motor - (100 - 140 L/min) |
| Flow control system valve  |
| Diverter valve (plug in and play)                                  |
| Safety and anticavitation valve                                    |
| Motor enclosed in the frame  |
| Belt transmission  |
| Bulkhead for hydraulic connections                                 |
| Hydraulic front hood   |
| Bite Limiter rotor   |


| OPTIONS                                     |
|---|
| Customized setting hydraulic motor          |
| Dedicated rear hood (deflector)             |
| Front fixed thumb bracked                   |
| Hydraulic thumb                             |
| Customized attachment bracket with pins     |
| Attachment plate with self levelling device |
| Multiple tooth options                      |

**FEATURES**

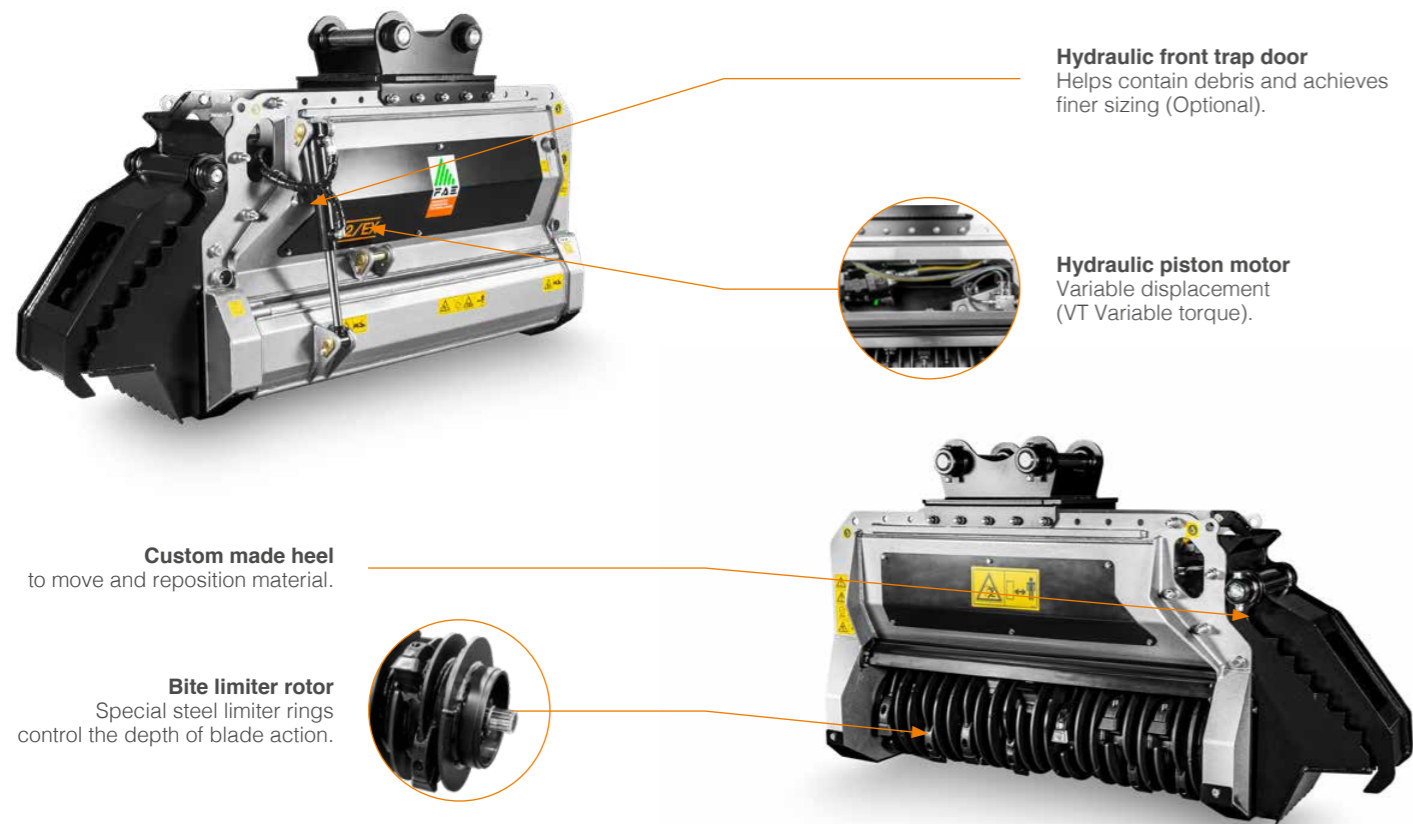

**LIGHT AND COMPACT**  
PERFECT FOR MIDSIZE EXCAVATORS

**MAIN OPTIONS**

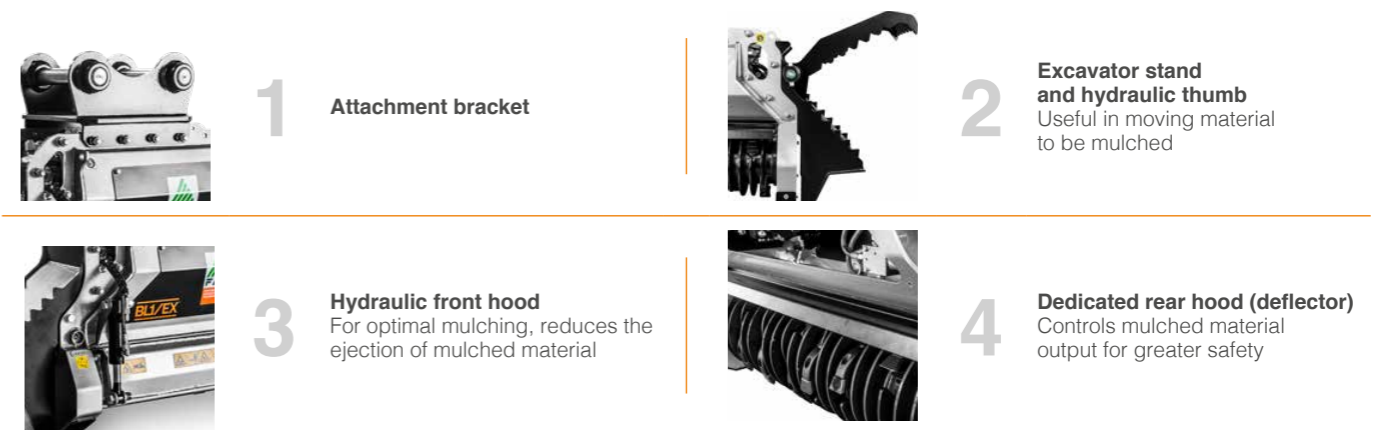

| MODEL         | Flow rate (L/min) |     | Pressure (bar) |     | Excavator weight (t) |     | Working width (mm) | Weight (kg) | Max shredding diameter (mm) | No. teeth E |
|---------------|-------------------|-----|----------------|-----|----------------------|-----|--------------------|-------------|-----------------------------|-------------|
|               | min               | max | min            | max | min                  | max |                    |             |                             |             |
| BL2/EX/VT 100 | 100               | 140 | 180            | 350 | 8                    | 14  | 1000               | 570         | 150                         | 18          |
| BL2/EX/VT 125 | 100               | 140 | 180            | 350 | 8                    | 14  | 1240               | 625         | 150                         | 22          |

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.