

Unverferth® Header Transports

Roadrunner and Fieldrunner



Farm to Farm; *Field to Field*



Header Transports

True trailing and towability **over any terrain**

The Unverferth Fieldrunner features 100 percent tool-free adjustability for matching most every header and platform and is perfect for shorter road trips and moving from field to field. Available in 42', 36', 30' and 25' models.

The patented rear oscillating axle keeps all four wheels in full contact with the ground, even through ditches and valleys for optimum trailing. Wide-spaced support beams provide enhanced stability and balance.

Models equipped with 12"-diameter tires feature 180° steering, while models with the larger diameter 15" tires feature 120° steering. An extended-length upper rest bar stays rigid for full-width resting of the combine head.

- Patented, tool-free adjustable, extendable height rest brackets for easily matching the head or platform; optional riser rest pads are available for specialty draper heads
- Extendable clevis hitch with standard transport chain for easy attachment to truck, combine or tractor
- 16' or 12' tongue with extendible clevis hitch and adjustable, spring-assisted-lift design for easy attachment to towing vehicle
- Heavy-duty, 8-ton hubs, spindles and automotive-type steering components for long-term dependability
- Heavy-duty 6-bolt wheels and a variety of tire options
- 2" tiedowns with easy-operating ratchet tighteners for securing the load
- Rear hitch for pulling units in tandem



Patented oscillating rear axle



180° steering



Standard tool-free 4-way adjustable rest bracket





Fieldrunner header transport



Width-adjustable light bar

- Standard lighting package with wiring routed through the frame for optimum durability
- Width-adjustable rear L.E.D. light bar for enhanced visibility and industry-standard 7-pin bladed receptacle for quick attachment to towing vehicle
- Retractable electric cord stores in tongue for added protection
- Extra-height ground clearance for easy field entry and exit
- 42', 36' and 30' models feature trussed lower rest bar for greater rigidity and strength
- Storage slot in upper rest bar for extra cutter knife
- Optional spare tire with carrier for on-the-road convenience



Spring-lift assist tongue



11x15 F-range tires on HT30 and larger models



Standard 2" tiedowns

Road-ready for a **high-speed harvest**

The Unverferth Roadrunner header transport is specifically designed and constructed for longer-haul highway travel. It's the ideal hauler for your combine's grain platform, draper head, chopper or conventional corn head and available in 48', 42', 36' and 30' models.

Roadrunner header transports are constructed with an integral chassis design and features a tool-free, fully adjustable upper rest bar and tool-free, 4-way adjustable rest brackets for matching the varying sizes and styles of any brand header or platform.

The Roadrunner's tricycle front axle allows for a tighter turning radius and greater maneuverability. The front and rear torsion-flex axles and highway-speed rated tires ensure stable tracking and towing that gets you down the road and onto the next farm as quickly as possible.

- Adjustable trussed-frame design for carrying the heaviest loads while keeping full-width support
- Extended-length upper rest bar for full-width resting of combine head
- Three upper bar supports for full-width header support
- 4-way, tool-free adjustable rest brackets to fit any brand header or platform
- Standard 12 ½" wide pads to accommodate draper heads with under-frame stowage when the traditional brackets are used
- Available with 2-, 4- or 6-wheel brakes, depending on model, and includes break-away kit for added safety
- Plastic-molded full-wrap front fenders turn with wheels to protect pickup tailgates and headers from stone chips and debris
- Tandem 6,000 lb. rear axles are adjustable for accommodating various feeder-house designs



Roadrunner header transport



Front torsion suspension



Rear torsion suspension




Riser bracket for draper heads



- Adjustable tongue length from 57" to 81" and telescopes to 91" for easy hookup
- Width-adjustable L.E.D. light bar attaches to rear of upper rest bar for greater visibility
- Rear brake and turn signal lights and double transport safety chains for enhanced safety
- The tongue rotates completely beneath the frame for space-efficient storage
- Industry-standard 7-pin bladed receptacle for attachment to towing vehicle is standard; electric cord routes through frame for added protection
- Choice of 15"- or 16"-diameter tires on 30', 36' and 42' models; 16" standard on 48' models
- Standard clevis hitch with pintle or ball-hitch conversion package available
- Storage slot in upper rest bar for extra cutter knife
- Durable finish in choice of tractor red or green
- Optional spare tire complete with mounting bracket provides easy access for quickly changing tire, even when loaded



Adjustable rear axles

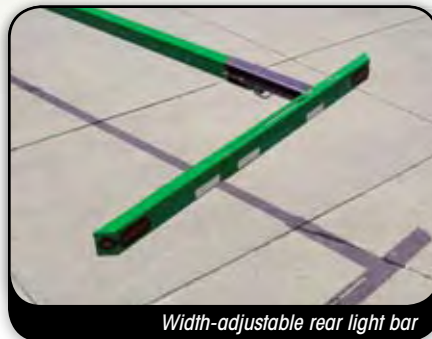

Width-adjustable rear light bar



Optional spare tire

Unverferth Roadrunner Model Specifications

Model Number	548 Tricycle Front Tandem Rear Axle	542 Tricycle Front Tandem Rear Axle	536 Tricycle Front Tandem Rear Axle		530 Tricycle Front Tandem Rear Axle	
Fits Conventional Grain Platforms	48' and smaller	40' and smaller	35' and smaller	35' and smaller	30' and smaller	30' and smaller
Fits Draper Platforms	48' and smaller	42' and smaller	36' and smaller	36' and smaller	30' and smaller	30' and smaller
Fits Corn Heads	16-row & smaller	16-row & smaller	For specialty & narrow row heads	12-row & smaller	For specialty & narrow row heads	12-row & smaller
Carrying Capacity	14,000 lbs.	14,000 lbs.	14,000 lbs.	11,000 lbs.	14,000 lbs.	11,000 lbs.
Tires (highway rated), Front & Rear	235/80x16	235/80x16	235/80x16	225/75x15	235/80x16	225/75x15
Approx. Weight with Wheels and Tires	4,600 lbs.	4,490 lbs.	3,910 lbs.	3,790 lbs.	3,935 lbs.	3,635 lbs.
Rear Wheel Tread Width	6"	6"	6"	6"	6"	6"
Bracket Height Adjustment, Maximum	2'8"	2'8"	2'8"	2'6"	2'8"	2'6"
Bracket Height Adjustment, Minimum	2'4"	2'4"	2'0"	1'10"	2'0"	1'10"
Span Between Upper/Lower Bar, Maximum	4'9"	4'9"	4'9"	4'9"	4'9"	4'9"
Span Between Upper/Lower Bar, Minimum	2'10"	2'10"	2'10"	2'10"	2'10"	2'10"
Overall Length (approximate)	59'5"	53'5"	47'5"	47'5"	41'5"	41'5"
Upper Support Tube Dimensions	6"x 3"x49"	6"x 3"x43"	6"x 3"x37"	6"x 3"x37"	5"x 3"x31"	5"x 3"x31"
Rest Pad Adjustment Length	27'10"-25'4"	27'10"-25'4"	23'3"-22'6"	23'3"-22'6"	23'6"-22'6"	23'6"-22'6"
Tongue Length	5'9"	5'9"	5'9"	5'9"	5'9"	5'9"
Wheel Base	32'6"-30'	32'6"-30'	28'1"-27'4"	28'1"-27'4"	28'1"-27'4"	28'1"-27'4"
Upper Bar Height Adjustment, Maximum	4'0"	4'0"	4'0"	3'10"	4'0"	3'10"
Upper Bar Height Adjustment, Minimum	3'0"	3'0"	3'0"	2'10"	3'0"	2'10"

Unverferth Fieldrunner Model Specifications

Model Number	HT-42 Auto-Type Steering	HT-36 Auto-Type Steering	HT-D30 Auto-Type Steering	HT-30 Auto-Type Steering	HT-25 Auto-Type Steering
Fits Conventional Grain Platforms	42' and smaller	35' and smaller	30' and smaller	30' and smaller	25' and smaller
Fits Draper Platforms	42' and smaller	36'	30'	N/A	25'
Fits Corn Heads	16-row & specialty corn head	12-row & smaller	12-row & smaller	12-row & smaller	12-row & smaller
Carrying Capacity with Standard Tires	13,000 lbs.	8,500 lbs.	8,500 lbs.	8,500 lbs.	8,500 lbs.
Standard Tires	11Lx15 F-range	22.5x8.00-12 F-range	22.5x8.00-12 F-range	22.5x8.00-12 F-range	22.5x8.00-12 F-range
Approx. Weight with Wheels and Tires	2,180 lbs.	1,800 lbs.	1,530 lbs.	1,600 lbs.	1,290 lbs.
Tread Width	6'	6'	6'	6'	6'
Height Adjustment, Maximum	3'11"	3'11"	3'11"	3'11"	3'9"
Height Adjustment, Minimum	2'8"	2'8"	2'8"	2'8"	2'5"
Bracket Height Adjustment, Maximum	2'8"	2'8"	2'8"	2'8"	2'5"
Bracket Height Adjustment, Minimum	2'2"	2'2"	1'9"	N/A	N/A
Upper Support Tube Dimensions	8"x 4"x43"	6"x 3"x37"	5"x 3"x31"	5"x 3"x31"	5"x 3"x26"
Hitch to Front Axle Standard Latched Position	16'	16'	16'	12'	12'
Optional Latched Position	N/A	N/A	N/A	16'	16'
Wheel Base	20'	18'5"	14'5"	18'5"	14'5"
Overall Length (approximate)	52'7"	46'7"	41'11"	39'1"	34'1"
Span Between Upper/Lower Bar, Maximum	4'4"	4'4"	4'4"	4'4"	4'4"
Span Between Upper/Lower Bar, Minimum	2'11"	2'11"	2'11"	2'11"	2'11"

See your nearest Unverferth dealer today or check our website at www.unverferth.com for complete details about all Unverferth header transports — they're the right tool for the job.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



Manufacturing Company, Inc.
P.O. Box 357 • Kalida, Ohio 45853
(419) 532-3121 • FAX (419) 532-2468
unverferth.com

1-800-322-6301

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.



©2010 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada

U.S. Patents 5,374,082; 5,374,087; 6,272,824; 5,785,472



HT0151800M01