


WMP20



- Output 833 litres (183 Imp. gal.) / min capacity
- Honda GX160T2 OHV engine
- 50 mm (2 in) suction and discharge ports
- Designed for pumping a diversity of industrial and agricultural liquid chemicals

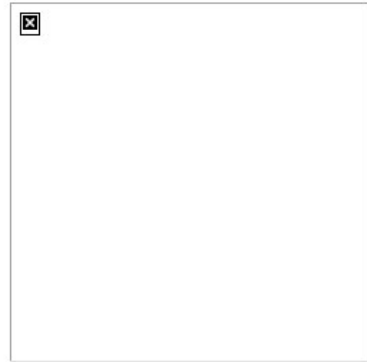

SPECIFICATIONS

WATER PUMP TYPE	Multi-purpose	Honda ENGINE	GX160T2
PUMP	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	163 cc (9.95 CID)
SUCTION PORT DIAMETER	50.0 mm (2.0 in)	LUBRICATION SYSTEM	Forced splash
DISCHARGE PORT DIAMETER	50.0 mm (2.0 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	833	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	220	FUEL TANK CAPACITY	3.10 L (0.68 Imp. gal)
LITRES PER HOUR	49980	OIL ALERT ©	Standard
IMP. GAL. PER HOUR	13200	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	32 m (105 ft)	FRAME TYPE	Full frame
SUCTION HEAD (TOTAL LIFT)	8 m (26 ft)	LENGTH	52.0 cm (20.5 in)
PRIMING TIME @ 5 M (16.4 FT.)	65 seconds	WIDTH	40.0 cm (15.7 in)
PUMP BODY	Fiberglass reinforced polyester	HEIGHT	45.0 cm (17.7 in)
IMPELLER	Fiberglass reinforced polyester	DRY WEIGHT	26 kg (57 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.