


WT30



- Honda GX240 OHV engine
- 80 mm (3") suction and discharge ports
- Pumps 1,210 litres per minute (266 Imp. gal. per minute)
- Commercial drainage

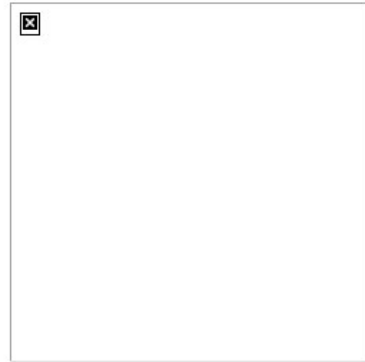

SPECIFICATIONS

WATER PUMP TYPE	Trash	Honda ENGINE	GX270T2
PUMP	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	270 cc (16.50 CID)
SUCTION PORT DIAMETER	80.0 mm (3.0 in)	LUBRICATION SYSTEM	Forced spray
DISCHARGE PORT DIAMETER	80.0 mm (3.0 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	1210	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	266	FUEL TANK CAPACITY	5.30 L (1.17 Imp. gal)
LITRES PER HOUR	72600	OIL ALERT	Standard
IMP. GAL. PER HOUR	15960	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	27 m (89 ft)	FRAME TYPE	Full frame
SUCTION HEAD (TOTAL LIFT)	8 m (26 ft)	LENGTH	66.0 cm (26.0 in)
PRIMING TIME @ 4.5 M (14.8 FT.)	90 seconds	WIDTH	49.5 cm (19.5 in)
PUMP BODY	Aluminum	HEIGHT	51.5 cm (20.3 in)
IMPELLER	Conical cast iron	DRY WEIGHT	61.0 kg (134.0 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.