


WT40



- Honda GX390 OHV engine
- 100 mm (4 in) suction and discharge ports
- Pumps 1,640 litres per minute (361 Imp. gal. per minute)
- Commercial drainage

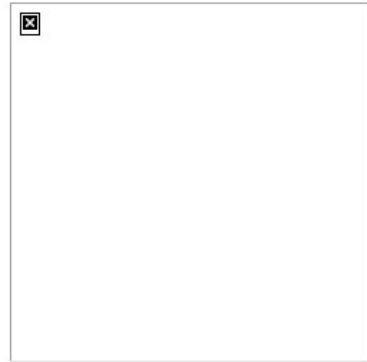

SPECIFICATIONS

WATER PUMP TYPE	Trash	Honda ENGINE	GX390T2
PUMP	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	389 cc (23.70 CID)
SUCTION PORT DIAMETER	100.0 mm (4.0 in)	LUBRICATION SYSTEM	Forced spray
DISCHARGE PORT DIAMETER	100.0 mm (4.0 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	1640	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	361	FUEL TANK CAPACITY	6.10 L (1.34 Imp. gal)
LITRES PER HOUR	98400	OIL ALERT	Standard
IMP. GAL. PER HOUR	21660	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	27 m (89 ft)	FRAME TYPE	Full frame
SUCTION HEAD (TOTAL LIFT)	8 m (26 ft)	LENGTH	73.5 cm (28.9 in)
PRIMING TIME @ 4.5 M (14.8 FT.)	150 seconds	WIDTH	53.5 cm (21.1 in)
PUMP BODY	Aluminum	HEIGHT	56.5 cm (22.2 in)
IMPELLER	Conical cast iron	DRY WEIGHT	78.0 kg (172.0 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.