




## PML/HY

Mulcher with swinging hammers rotor for excavators having a weight between 1.5 and 3.5 t.

**Standard equipment:** 8cc gear motors with integrated anticavitation valve, self-cleaning rear roller, self levelling back protection, PML hammers or Y-flails.

**Options:** 16cc gear motors with integrated anticavitation valve, custom made attachment plate with pins, attachment plate with self leveling device.

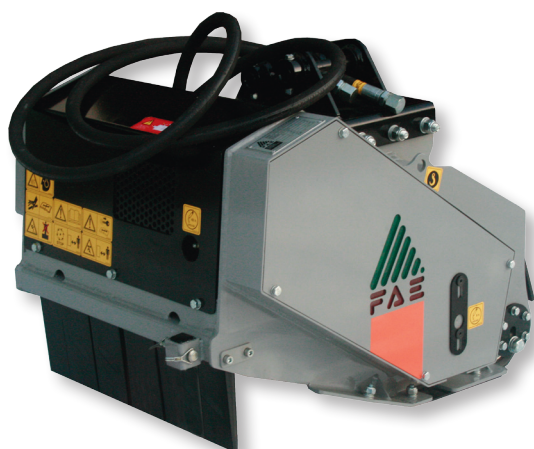

## PML/HY

Model	Power HP	Requirements		Excavator weight t.	Working width inches	Weight lbs	Grinding diameter inches (max)	Hammers	
	Min - Max	Flow gal/min Min - Max	Pressure PSI Min - Max					q.ty/type PML Y	
PML/HY 50	20 - 35	4 - 5	2200 - 2460	1.5 - 3.5	20	355	0.8	8	8
PML/HY 70	25 - 35	4 - 5	2200 - 2460	2.0 - 3.5	28	400	0.8	10	10
PML/HY 90	30 - 35	4 - 5	2200 - 2460	2.5 - 3.5	36	450	0.8	14	14

*Data refers to the machine without options.*



Hammer type "PML"



Hammer type "Y"