




## SSH

Forestry tiller with a max grinding diameter of 27 inches for tractors between 160 and 400 HP.

**Standard equipment:** dual transmission, PTO driveshaft with cam clutch, gearbox with freewheel, hydraulic rear hood, adjustable counter blade, KIT - Filtration System.

**Options:** hydraulic top link, hydraulic support roller for height adjustment, adjustable dozing blade, option of rotor equipped with tooth type "A/HD".

**Notes:** For the correct usage, a creeper gear transmission is recommended.

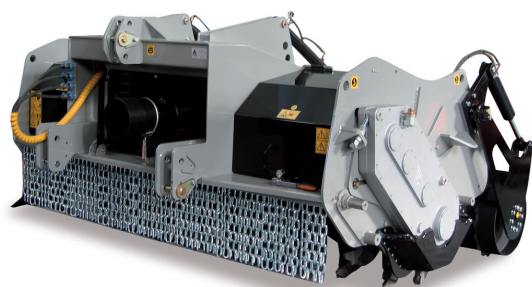

## SSH

Model	Tractor HP min	Tractor HP max	PTO rpm	Working width inches	Overall width inches	Weight lbs	Grinding diameter inches (max)	Working depth inches (max)	Teeth q.ty/type A+MH
SSH 150	160	280	1000	63	78	8092	27	20	58+4
SSH 175	180	280	1000	72	87	8644	27	20	66+4
SSH 200	200	400	1000	82	97	9371	27	20	78+4
SSH 225	220	400	1000	91	106	10099	27	20	88+4
SSH 250	240	400	1000	101	116	10694	27	20	98+4

Data refers to the machine without options.



Tooth type A (standard)



Tooth type A/HD (option)



Tooth type F (option)



Side scraper Type MH