

ALL IN ONE Equipment



Use with a planter



Use for strip-till application



Use for side-dressing application



Use with an air-drill

Use with an inter crop cultivator

Use with an Air-boom spreader



ALR2304AM

The ALR2304AM precision pneumatic applicator is very versatile and offers high capacity. You can attached on the ALR2304AM an air-boom spreader. It can also be equipped with a toolbar for fertilizer application with discs or shanks. It can hook up units for Zone-till, inter crop cultivator, air-drill, corn planter 8 to 16 rows and also band or boom spreader.



ALL IN ONE Machine

- 5 to 7,5 tons capacity (fertilizer) 6.5 tons (seed) (200 bu. / 7000 L)
- Can be used to apply every granular product
- Front hydraulic lifting toolbar for fertilizer openers
- Rear hydraulic lifting 3 point hitch (18 000 lbs capacity)
- Can be use with :
 - A 8 to 16 row planter at 30in spacing
 - A 18 row planter at 20 in spacing
 - An air-drill 20 to 30 ft
 - An Air-boom spreading applicator up to 60 ft
 - A toolbar up to 16 rows(Side-dressing applicator, Zone-till, Inter crop)

MAIN ADVANTAGES

- It meets the needs of granular fertilizer application in side-dressing
- Possibility of fertilizer application with strip-till toolbar
- The front toolbar allows :
 - better stability of the applicator (transport and working position)
 - good visibility on the fertilizer coulters
 - facilitates the exit and the entry at the end of the rows
- With the same equipment :
 - It can be adapt with a 6 to 16 row planter
 - It can be adapt with a 15 to 30 ft air-drill
 - It can be adapt with a 40 to 60 ft spreading air-boom
 - It can be use for your side-dressing application



 **AULARI**

ALR2304AM

For 8 to 16 rows planter

The ALR2304AM precision pneumatic applicator can be hook on a 6 to 16 row planter.



Specifications

- 5 tons Stainless steel hopper (200 bu. / 7000 L) with rollover tarp
 - Stainless steel air distribution system
 - Mechanical drive system with variable metering adjustment
 - Up to 12 row front toolbar with flexible wings
 - Blower driven by 540 or 1000 rpm PTO
 - Rear 3 point hitch CAT III
 - Undercarriage on 4 radial tires 14.9R38
 - Manual sections shutoff
- Other options offered (See EQUIPMENTS):
- Electronic scale
 - Many hydraulic options
 - Digital acreage monitor
 - Signal and work light kit
 - Transfer auger
 - Hydraulic sections shutoff with electric controller
 - Central seed filling kit
 - AULARI fertilizer coulters
 - Triple wheels kit (Many wheels kits available)
 - Stack fold for planter unit
 - No-till markers



AULARI

ALR2304AM

For a 20 to 30 ft air-drill


The ALR2304AM precision pneumatic applicator can be hook on a 20 to 30 feet air-drill.



Specifications

- **6.5 ton Stainless steel hopper (200 bu. / 7000 L) with rollover tarp**
- **Stainless steel air distribution system**
- **Mechanical drive system with variable metering adjustment**
- **Up to 30 feet front toolbar with flexible wings**
- **540 or 1000 rpm PTO drive blower**
- **Rear 3 point hitch CAT III**
- **Undercarriage on 4 radial tires 14.9R38 or 750 R26**
- **Manual sections shutoff**

- **Other options offered (See EQUIPMENTS):**
 - **Electronic scale**
 - **Many hydraulic options**
 - **Digital acreage monitor**
 - **Signal and work light kit**
 - **Transfer auger**
 - **Second compartment for fertilizer and seed blend on the go system**
 - **Hydraulic sections shutoff with electric controller**
 - **Seed and fertilizer splitter unit (pressure divider too)**
 - **Zone coulters for no-till application**
 - **SUNFLOWER seed openers made by AGCO**
 - **Stack fold toolbar for air-drill units**
 - **No-till markers**

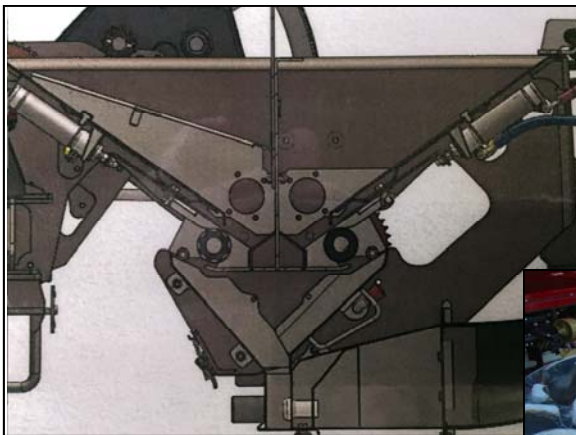

AULARI

1 877 892-2126 info@aulari.com www.aulari.com

ALR2304AM

For air-boom application

(Up to 60 ft)

The ALR2304AM precision pneumatic applicator provide high accuracy spreading over the entire working surface
The quantity of fertilizer to each deflector is identical.
The distribution is not affected by wind.



Specifications

- **Spray boom up to 60 feet wide with stainless steel pipes**
- **5 tons Stainless steel hopper (200 bu. / 7000 L) with rollover tarp**
- **Stainless steel air distribution system**
- **Mechanical drive system with variable metering adjustment**
- **Blower driven by PTO 1000 rpm**
- **Rear 3 point hitch CAT III, fixed or adjustable**
- **Many tires available (Single, dual, triple)**
- **Manual section shut off for boom sections**

- **Other options offered (See EQUIPMENTS):**
 - **Electronic scale**
 - **Many hydraulic options for the spreading boom**
 - **Digital acreage monitor**
 - **Signal and work light kit**
 - **Transfer auger**
 - **Second compartment for fertilizer and seed blend on the go system**
 - **Hydraulic sections shutoff with electric controller**
 - **Foam marker system with drop tube kit**
 - **Drop pipe for side dressing application**



AULARI

ALR2304AM

For side-dressing application

The ALR2304AM precision pneumatic applicator can be equipped with a toolbar for fertilizer application with disks or shanks

Specifications

- 5 Tons Stainless steel hopper (200 bu. / 7000 L) with tarp
 - Stainless steel air distribution system
 - Mechanical drive system with variable metering adjustment
 - 8 to 12 row front toolbar with flexible wings
 - Blower driven by PTO 540 or 1000 rpm
 - Undercarriage on 2 radial tires 14.9R38 or 12.4R42
 - Manual shutoff for tool bar section
- Other options offered (See EQUIPMENTS):
- Electronic scale
 - Many hydraulic options
 - Digital acreage monitor
 - Signal and work light kit
 - Transfer auger
 - Rear 3 point hitch CAT III
 - Hydraulic sections shut off with electric controller
 - AULARI fertilizer coulters



AULARI

1 877 892-2126 info@aulari.com www.aulari.com