



SEED PRO[®] **BULK BOX SEED TENDERS**

DUAL-PURPOSE **SEED HANDLING** **VERSATILITY**



Models 410XL,
410 and 210
umequip.com

BULK SEED HANDLING



Unverferth® **BULK SEED HANDLING**

DUAL-PURPOSE SEED HANDLING EFFICIENCY, VERSATILITY

As Mother Nature proves yearly, efficiency is your most valuable ally during planting season. The Unverferth Seed Pro® bulk box seed tenders boost your efficiency by delivering four or two 50-unit seed boxes directly to your planter or drill. You can even position the patented conveyor parallel to the Seed Pro tender for transferring seed from one container to another for dual purpose seed handling versatility.



Large collapsible canvas hopper



Cupped rows of offset cleats



Spring-lift assist

CONVEYER

- Patented 5-ply rubber conveyor belt features offset rows of U-shaped cleats for unloading seed at speeds up to 16 bushels per minute (6" tube with 8" belt) or 35 bushels per minute (8" tube with 12" belt available on models 410XL and 410)
- Hydraulically operated vertical-height adjustment for easy movement into the loading/unloading or transport positions — 68" on model 410XL, 54" on models 410 and 210
- Electronic speed control for adjusting conveyor speed independently of the engine speed
- Model 410XL features a 21' steel tube conveyor and the 410 and 210 feature an 18'
- Included downspouts are a 4' flexible for filling central-fill units and extendable 4' to 6' telescopic downspout for a total reach of 30'; optional 10' telescopic for up to 10' more reach
- Conveyor inlet features brush-seal-brush design with patented side seals for minimizing seed damage and lower tool-free hinged door for easy cleanout
- Rounded conveyor hood provides enhanced seed flow and is rubber lined to maximize seed quality
- 18' steel tube conveyor with 4' flexible spout for filling central fill units and a 4'-6' telescoping downspout for total reach of 30'; optional 10' downspout reaches up to 40'
- Large collapsible canvas hopper for easier filling and includes vinyl cover for keeping clean and dry during transport
- Conveyor can be locked into position in 3/4" increments, which translates to being able to position the spout at 10" increments for the greatest unloading flexibility
- Standard on/off and conveyor raise/lower wired remote with magnetic mount
- Smooth starting, top-mounted, 6-cubic-inch hydraulic motor pulls the belt forward, keeping it tight for the most efficient seed movement and reduced motor stress



Standard wired remote

BULK BOX SEED TENDERS

PLATFORM


- Easy-opening 5" x 6" doors for regulating seed flow into conveyor; dual unloading doors and chutes on models 410XL and 410
- Heavy-duty steel hinged latches with locks for securely fastening bulk boxes
- Unloading chutes with steep-sloped funnel design feed conveyor from central point for fast and complete unloading efficiency
- Each compartment features self-sealing rubber funnels for channeling seed from the boxes and easy-to-attach lids for keeping the unit clean during storage
- Side-mounted windows provide added unloading visibility of each compartment
- Powered by 390 cc (11.7 net HP) Honda gas engine with electric start and controls conveniently located on operating side of the unit. Battery quick disconnect conserves battery in storage



Heavy-duty steel hinged latches

UNDERCARRIAGE

- Undercarriages feature heavy-duty steel construction; model 410XL and 410 feature two 7,000 lb. torsion axles, and model 210 features a 4,000 lb. torsion axle
- Electric all-wheel braking and LED running, hazard and brake lights, and reflective striping for added transport safety
- Even weight distribution for added transport safety. Model 210 places units side-by-side for even tongue weight, including when one is empty
- Trademarked ivory and tan speckle finish provides optimum corrosion resistance to keep your investment looking new

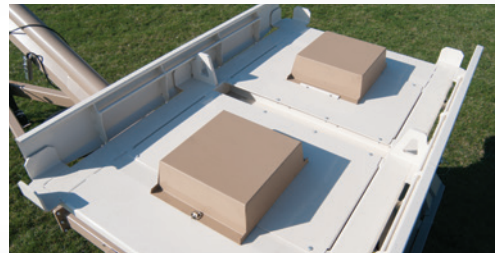

Unloading chutes with storage lids



Hydraulically operated vertical height adjustment — 68" on model 410XL, 54" on models 410 and 210

OPTIONS



3-function remote



6-function wireless remote



Gooseneck hitch



Model 2520 scale package

- Wireless remote options all feature weather-resistant, heavy-duty plastic construction for withstanding harsh conditions and manual override for simple operation without the remote
- 3- and 6-function remotes for 410XL and 410:
 - 3-function unit controls conveyor on/off; conveyor raise/lower; open/close chute doors
 - 6-function unit includes LCD display and adds engine start/stop and emergency off switch; raise/lower conveyor; conveyor swing left or right
- 2-function wireless remote for model 210 controls ON-OFF and conveyor height adjustment
- Gooseneck hitch available for models 410XL and 410 for greater towing ease; features heavy-duty jack for parking and is adjustable for easily attaching to truck
- Hydraulic-operated jack for even greater parking ease for bumper or gooseneck hitch
- Available cushioned receiver for smoother transport and 5th-wheel conversion for pulling with semi
- Model 2520 optional scale features standard operations for verifying the quantity of seed delivered with large LCD readout; scale monitor is enclosed in weather-tight box
 - Features auto conveyor shut-off for metering the exact amount of seed into the planter
 - Built-in calculator that determines weight per box needed and individual box weighing
- LED worklight kit includes 3 spotlights, 2 mounted to the platform and 1 at the conveyor top for easier nighttime filling



OPTIONS



T&G applicator



Internal agitation prevents bridging

- Patented T&G applicator for applying talc or graphite for optimum planter lubrication and more consistent seed placement
 - Automatically turns on and off in conjunction with conveyor
 - 50-lb. capacity and lower cleanout door
 - Weather-tight hopper lid keeps contents dry; gas-strut lift-assist for easy opening and filling
- Augers material into conveyor outlet and powered by Seed Pro hydraulics
- Auger system and patented internal agitation provide even coating and virtually eliminates material bridging
- Includes metering control for delivering correct amount



Spare tire



Aluminum wheels

- Spare tire for easily getting back on the road
- Aluminum wheels available for models 410XL and 410



SPECIFICATIONS

Seed Pro Bulk Box Seed Tender Specifications

Description		410XL - 4 Seed Box	410 - 4 Seed Box	210 - 2 Seed Box
Overall Length	with Bumper Hitch	25'7"	22'11"	21'
	with Gooseneck Hitch	25'7"	23'6"	—
Overall Width Transport		8'6"	8'6"	8'6"
Overall Height Transport (Platform)		5'10"	5'10"	5'6"
Overall Load Height (with boxes)		11'1"	11'1"	10'9"
Platform Length		9'9"	9'9"	8'2"
Undercarriage Length		20'6"	18'6"	17'
Overall Length Hitch To Rear Bumper		20'9"	18'9"	17'
Undercarriage Deck Height		1'10"	1'10"	1'10"
Undercarriage Under Frame Clearance		1'2"	1'2"	1'2"
Conveyor Clearance In Transport Position		9'10"	9'3"	8'2"
Overall Conveyor Height In Transport Position		11'11"	10'10"	10'2"
Conveyor Maximum Unload Height		14'2"	12'8"	12'4"
Conveyor Reach At Maximum Unload Height		14'7"	11'3"	11'
Conveyor Minimum Unload Height		9'10"	9'3"	8'2"
Conveyor Reach At Minimum Unload Height		16'10"	13'3"	13'
Approximate Empty Weight		5,900 Lbs.	5,200 Lbs.	3,800 lbs.
Loaded Tongue Weight		1,150 Lbs.	1,000 Lbs.	700 lbs.
Lighting Connector		7-Pin Flat	7-Pin Flat	7-Pin Flat
Standard Downspout Reach (2-Stage Spout)		30' (12-Row Planter)	30' (12-Row Planter)	30' (12-Row Planter)
Maximum Downspout Reach (3-Stage Spout)		40' (16-Row Planter)	40' (16-Row Planter)	40' (16-Row Planter)
Base Length - Less Undercarriage		10'6"	10'6"	9'4"
Base Width - Less Undercarriage		6'11"	6'11"	6'11"
Overall Height - Less Undercarriage		10'3"	10'3"	9'5"

See your nearest Unverferth dealer today for complete details on the Seed Pro bulk box seed tenders or visit our website at www.umequip.com.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit unverferth.com/patents.

Unverferth
Manufacturing Company, Inc.

© 2020 Unverferth Manufacturing Co., Inc.
Printed in U.S.A.

P.O. Box 357 | Kalida, OH 45853 | unverferth.com | 419.532.3121

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH
Honda is a registered trademark of Honda Motor Company, Japan

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon, Texas,
Ontario and Saskatchewan, Canada



USP0251300M3