

MULCHERS FOR SKID STEERS

PMM/SSL



from 60 to 100 HP



Ø8 cm max

BRUSH MULCHER WITH HAMMER/FLAIL ROTOR FOR SKID STEERS.

A universal mulcher suitable for mulching bramble bushes, crop residues, bushes and grass. Thanks to its “floating system”, the mulcher’s rotor adheres perfectly to the terrain, ensuring a homogeneous material after mulching.

The support roller, larger in comparison to other attachments, guarantees the best performance even on particularly damp terrain.


The machine can be equipped with hammers for mulching material up to 8 cm diameter or grass flails to better respond to the various needs of the customer.



STANDARD EQUIPMENT
Enclosed machine body
Belt transmission
Quick attachment plate with self leveling device for skid steer
32/65cc variable manual displacement hydraulic piston motor with relief and anticavitation valve
Welded counter blade
Self cleaning rear roller with integrated skids

Attachment plate with self levelling device
Self levelling protection rubber
Possibility to have the rotor equipped with PML hammers or Y-flails

OPTIONS
Stronger bearing for back roller
Multiple flail options

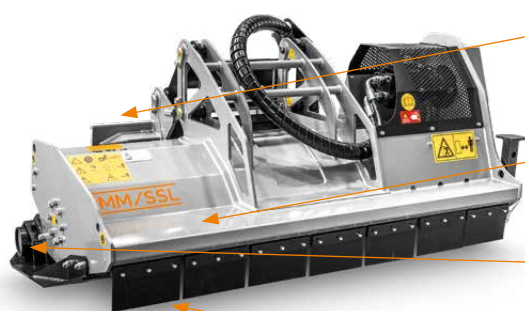

Attachment plate with self leveling device
adapts to all types of terrain



Steel counter-blades
helps mulch material into a smaller final size

Self cleaning rear roller with integrated skids

Self leveling protection rubber

MODEL	Engine (HP)		Flow rate (L/min)		Pressure (bar)		Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max					hammers	flails
PMM/SSL 150	60	100	60	130	180	250	1540	1760	790	80	18	18
PMM/SSL 175	65	100	60	130	180	250	1780	2000	850	80	22	22
PMM/SSL 200	70	100	60	130	180	250	2020	2180	910	80	24	24

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.